

WORK & PLAY 2023



WHY EARTHTRACK

Our capabilities are premised on adopting an entirely different approach in our industry involvement – one that understands and appreciates the practicalities of operating mine sites, running heavy engineering workshops and finding cost-saving solutions to everyday challenges.

Our clients require, and expect from us:

- Experience and understanding of site circumstances and conditions – we talk the same language and can grasp their problems immediately.
- Technical knowledge gained from years of hands-on industry experience.
- An appreciation of client's special requirements that enables us to offer proactive rather than reactive solutions.
- That we will handle their inquiry at a senior, decision-making level, and be able to provide immediate answers.
- The ability to quickly source products which are not necessarily readily available, and cut through the clutter of 'red tape' and transportation issues to deliver with fast response and quick turnaround in mind.
- Trouble shooting capabilities as well as the ability to solve technical problems by thinking outside the square.
- We strive to provide our client with better value and products that works for the application. Our advantage is that we also develop, design and custom make products to solve clients' specific site and workplace challenges.

Earthtrack Group Pty Ltd

www.etms.com.au | www.earthtrackgroup.com.au

1300 410 485 | Sales@etms.com.au

34 Remisko Drive, Forrestdale, WA

 earthtrack

 earthtrackgroup

 earthtrack group

 earthtrack_AU





Earthtrack Supply Group is the foremost supplier of industrial LED lights built tough and made to last even under the harshest conditions. Whether you are deep in the northern mines, running heavy construction equipment, or working long nights to harvest your crops, Earthtrack Supply Group has LED lighting solutions you can count on.

After the workday is done, then it's time to hit the trails in the off-road truck or Quad, and let the high-powered Earthtrack LEDs light the way for play! We offer an extensive line up of LED lighting options for your personal vehicle or off-road toys. Standard headlights may be fine for urban areas, but when you hit bad weather or remote road conditions, count on Earthtrack LED driving lights to lead the way for maximum visibility.

WORK LIGHTS

DIAMOND FIRE	3
ENFORCER	7
WORK MASTER	9
WORK BUDDY	14

LIGHT BARS

SABRE SERIES	33
SABRE SLIMLINE	34
SABRE DUAL LINE	36
SABRE CURVED	38
SABRE LASER	40

DRIVING LIGHTS

FIREBLADE	46
FIREBLADE MAXX	49
FIREBLADE LASER	52

ACCESSORIES

PORTABLE ACCESSORIES	57
----------------------	----

BLAZE SERIES

BLAZE HALO	61
BLAZE BEAM	62
SABRE BAR	63
SABRE POD	64



WORK LIGHTS



DIAMOND FIRE SERIES 3

ENFORCER SERIES 7

WORK MASTER SERIES 9

WORK BUDDY SERIES 14



QUICK PLUG & PLAY
DEUTSCH CONNECTOR



90° PRECISE
TILT ADJUSTMENT



MADE FOR
TOUGH ENVIRONMENTS



ADVANCED COOLING SYSTEM
BREATHER FILTERS




SIDE & REAR FINS EFFICIENTLY
DISPERSE HEAT, KEEPING THE LIGHTS
COOL & WORKING OPTIMALLY.



STRONG ADJUSTABLE BRACKET

DIAMOND FIRE

HEAVY DUTY WORK RANGE

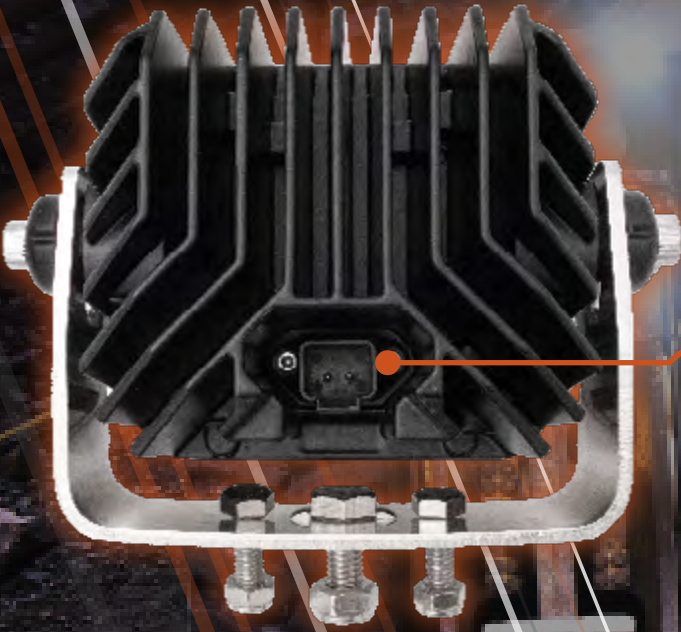

DIAMOND FIRE SERIES

HEAVY DUTY WORK RANGE



3 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP69 WATER RESISTANCE



25G RMS VIBRATION RATING


EVDF40LED
3.5" WIDTH

EVDF60LED
4.3" WIDTH

EVDF90LED
4.9" WIDTH

EVDF120LED
5.8" WIDTH

EVDF160LED
7" WIDTH

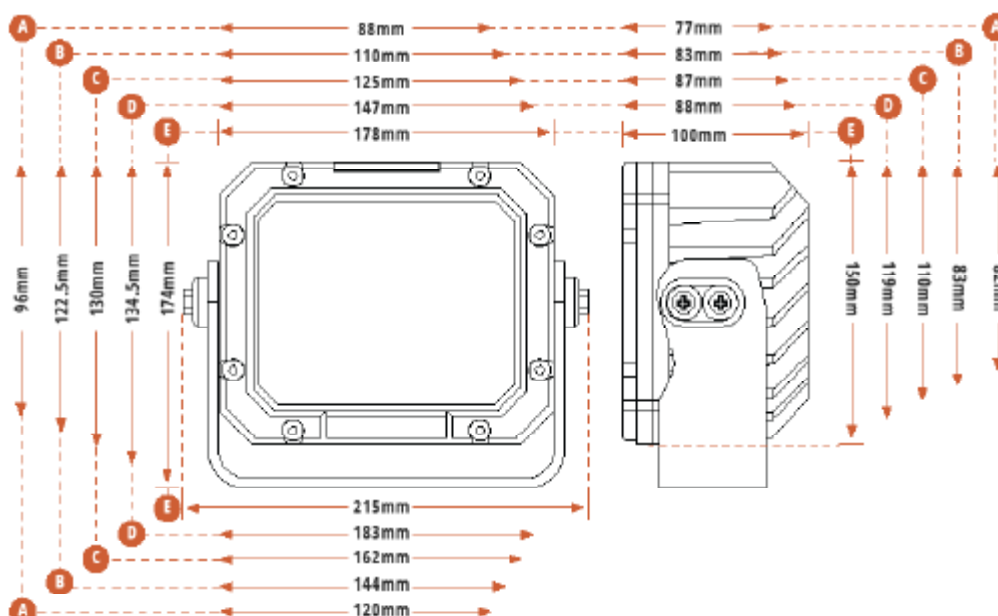

DIAMOND FIRE SERIES

HEAVY DUTY WORK RANGE



3 YEAR
WARRANTY
*ON LUMINAIRE



IMPACT
RESISTANT



IP69 WATER
RESISTANCE



25G RMS
VIBRATION



EVDF40LED
3.5" WIDTH



EVDF60LED
4.3" WIDTH

SPECIFICATIONS


	40W WORK LAMP
WATTAGE	40 WATT
LIGHT SOURCE	4 x 10W OSRAM LEDS
LIGHT OUTPUT	3,400 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
IP RATING	IP69
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	ADS12 ALUMINUM
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	30,000 HOURS
NET WEIGHT	1.2KG
MOUNTING SUITABLE	UPRIGHT & PENDANT
WARRANTY	3 YEARS

60W WORK LAMP

WATTAGE	60 WATT
LIGHT SOURCE	6 x 10W OSRAM LEDS
LIGHT OUTPUT	5,100 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
IP RATING	IP69
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	ADS12 ALUMINUM
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	30,000 HOURS
NET WEIGHT	1.6KG
MOUNTING SUITABLE	UPRIGHT & PENDANT
WARRANTY	3 YEARS

CODES

EURO BEAM

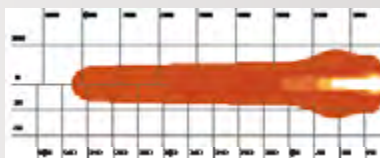


EVDF40LEDEU




EVDF60LEDEU

WIDE FLOOD BEAM

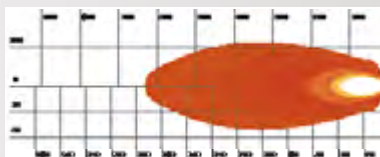

EVDF40LEDWF

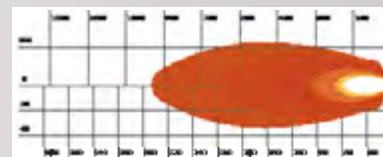

EVDF60LEDWF

DIAMOND FIRE SERIES

HEAVY DUTY WORK RANGE



EVDF90LED
4.9" WIDTH



EVDF120LED
5.8" WIDTH




EVDF160LED
7" WIDTH

90W WORK LAMP

90 WATT
9 × 10W OSRAM LEDS
7650 LUMEN
9V-32V DC
-45°C TO +85°C
IP69
DEUTSCH CONNECTOR
ADS12 ALUMINUM
POLYCARBONATE
STAINLESS STEEL
30,000 HOURS
2.2KG
UPRIGHT & PENDANT
3 YEARS



EVDF90LEDEU

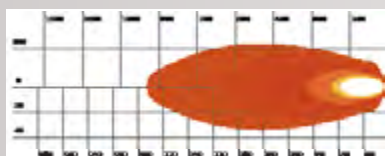


EVDF90LEDWF

120W WORK LAMP

120 WATT
12 × 10W OSRAM LEDS
10,200 LUMEN
9V-32V DC
-45°C TO +85°C
IP69
DEUTSCH CONNECTOR
ADS12 ALUMINUM
POLYCARBONATE
STAINLESS STEEL
30,000 HOURS
2.6KG
UPRIGHT & PENDANT
3 YEARS



EVDF120LEDEU

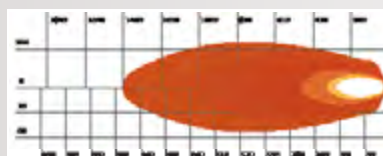


EVDF120LEDWF

160W WORK LAMP

160 WATT
16 × 10W OSRAM LEDS
13,600 LUMEN
9V-32V DC
-45°C TO +85°C
IP69
DEUTSCH CONNECTOR
ADS12 ALUMINUM
POLYCARBONATE
STAINLESS STEEL
30,000 HOURS
4.0 KG
UPRIGHT & PENDANT
3 YEARS



EVDF160LEDEU

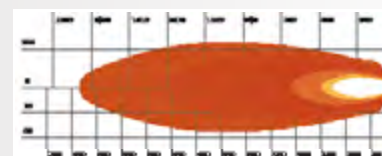

EVDF160LEDWF

ENFORCER

HEAVY DUTY WORK RANGE

120° PRECISE
TILT ADJUSTMENT



STRONG ADJUSTABLE BRACKET



MADE FOR
TOUGH ENVIRONMENTS




5 POINT SECURE FASTENING
FOR LIGHT BEAM STABILITY



ENFORCER SERIES

ENFORCER 60W LED HEAVY DUTY WORK LAMP

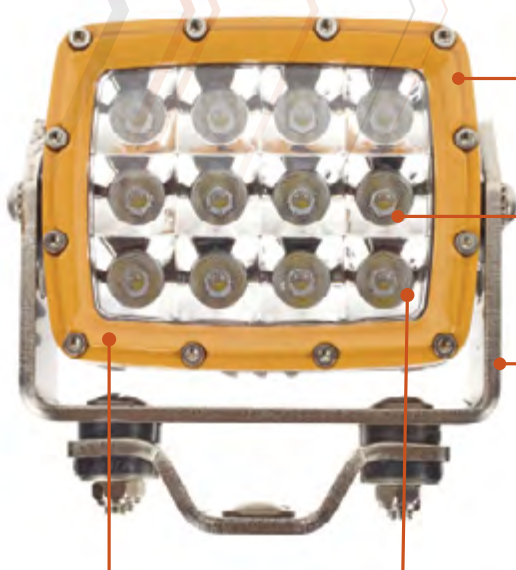


AL 6061
HOUSING

ULTRA CLEAR
PC LENS

COMPACT
DESIGN

HIGH
CLARITY
OPTICS

STAINLESS
STEEL
BRACKET

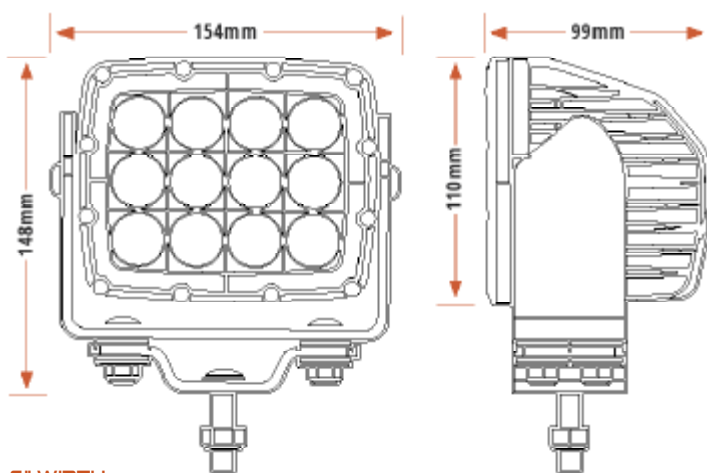

6" WIDTH



3 YEAR
WARRANTY
*ON LUMINAIRE



LOW POWER
DRAW



IP69 WATER
RESISTANCE



25G RMS
VIBRATION



SPECIFICATIONS

WATTAGE	60 WATT
LIGHT SOURCE	12 x 5W CREE LEDS
LIGHT OUTPUT	5,910 LUMEN
VOLTAGE	9V- 32V DC
CURRENT DRAW	5A @12V
OPERATING TEMP.	-40°C TO +80°C
COLOUR TEMP.	6500K
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	UPRIGHT & PENDANT

60W LED WORK LAMP

EURO BEAM
FLOOD BEAM

EVEN60LEDEU
EVEN60LEDWF

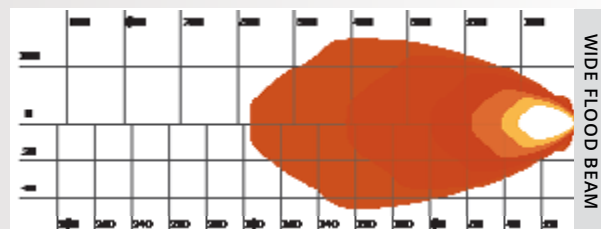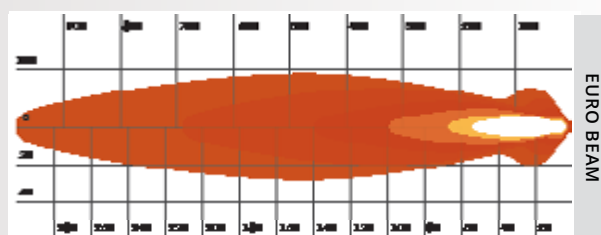

CODES





MADE FOR
TOUGH ENVIRONMENTS



360° PRECISE
TILT ADJUSTMENT

WORK MASTER

HEAVY DUTY WORK RANGE



VIRTUALLY UNBREAKABLE LENS
SUPER HEAVY DUTY POLYCARBONATE



STRONG ADJUSTABLE BRACKET




5 POINT SECURE FASTENING
FOR LIGHT BEAM STABILITY



WORK MASTER SERIES

WORK MASTER 50W LED WORK LAMP

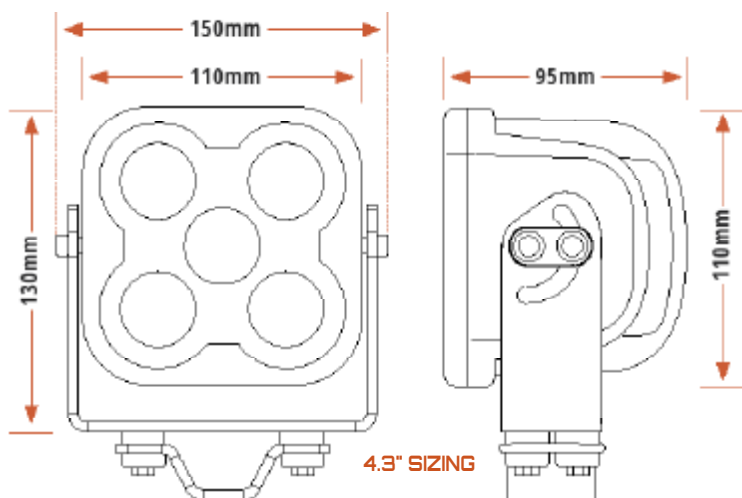

100° TILT



ULTRA CLEAR PC LENS



5 POINT FASTENING



HIGH CLARITY OPTICS



COMPACT DESIGN



AL 6061 HOUSING

STAINLESS STEEL BRACKET



3 YEAR WARRANTY
*ON LUMINAIRE



2.0KG WEIGHT



IP69 WATER RESISTANCE



25G RMS VIBRATION




SPECIFICATIONS

WATTAGE	50 WATT
LIGHT SOURCE	5 × 10W CREE LEDS
LIGHT OUTPUT	3,500 LUMEN
VOLTAGE	9V-32V DC
CURRENT DRAW	4.17A @ 12V
OPERATING TEMP.	-40°C TO +85°C
COLOUR TEMP.	6500K
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	SIDE

50W LED WORK LAMP

CODES

EURO BEAM	EVWM50LEDEU/S
FLOOD BEAM	EVWM50LEDWF/S

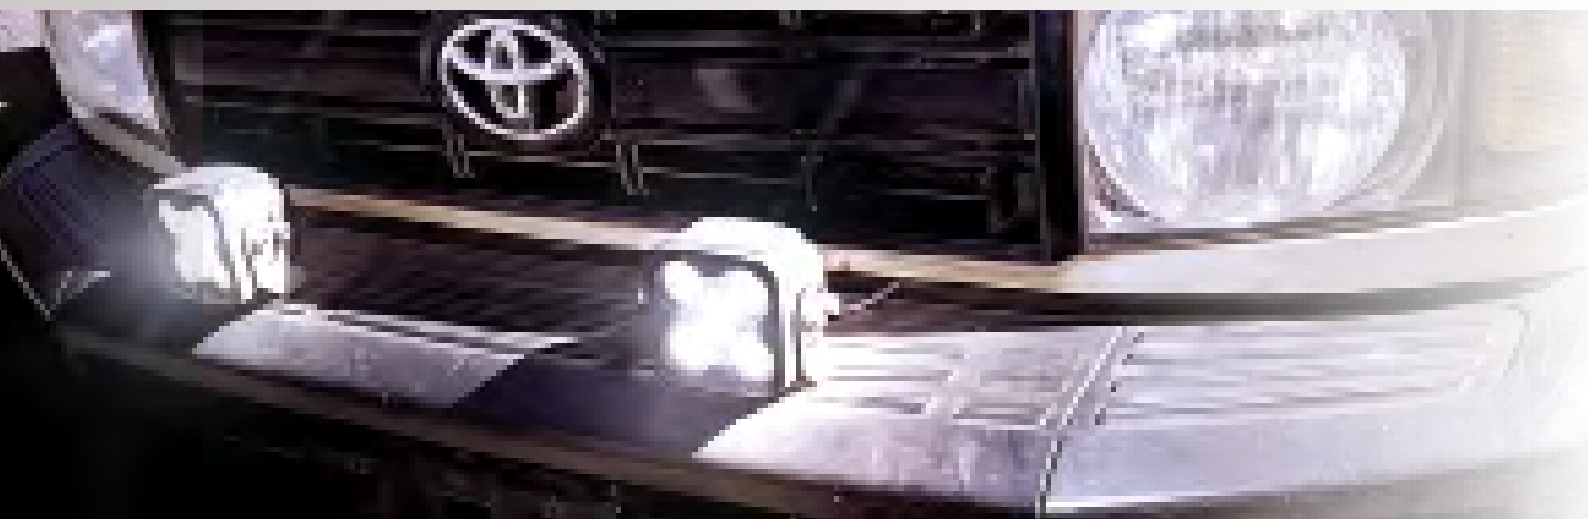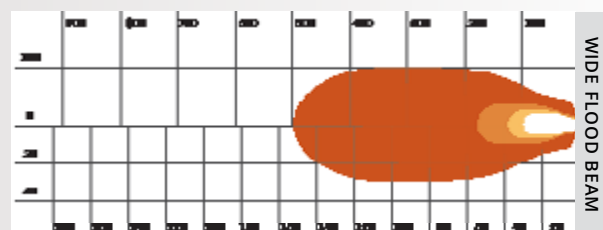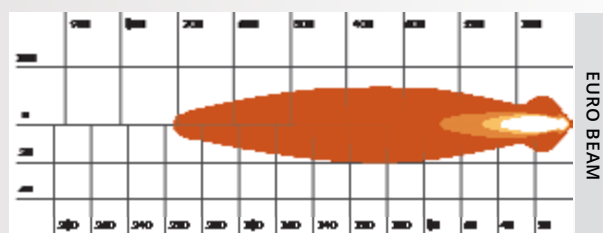

WORK MASTER SERIES

WORK MASTER 60W | 100W LED WORK LAMP



3 YEAR
WARRANTY
*ON LUMINAIRE



IMPACT
RESISTANT



IP67 WATER
RESISTANCE



25G RMS
VIBRATION



100° TILT



HIGH
CLARITY
OPTICS



COMPACT
DESIGN



AL 6061
HOUSING




2.4KG/
3.0KG



STAINLESS
STEEL
BRACKET



5 POINT
FASTENING

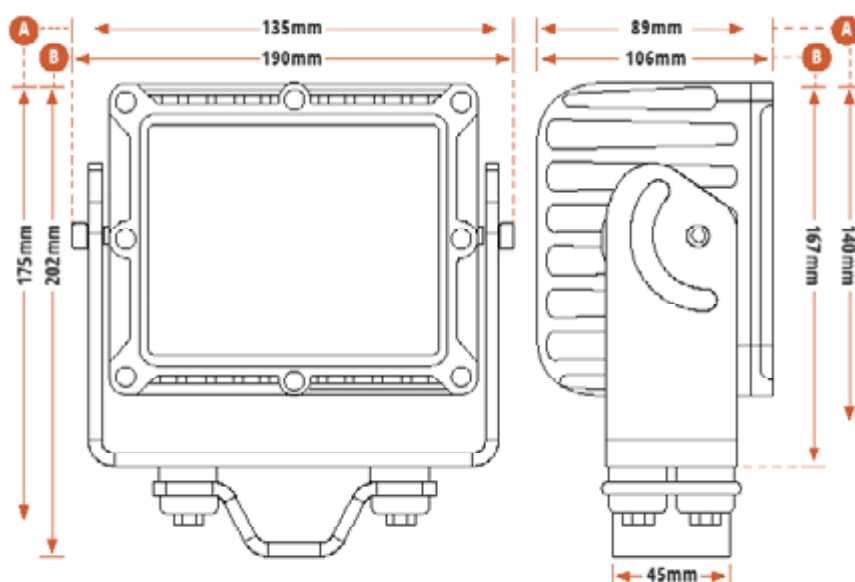

WORK MASTER SERIES

WORK MASTER 60W | 100W LED WORK LAMP



EVWM60LED
4.9" WIDTH



EVWM100LED
5.8" WIDTH

SPECIFICATIONS


WATTAGE
LIGHT SOURCE
LIGHT OUTPUT
VOLTAGE
OPERATING TEMP.
COLOUR TEMP.
CONNECTOR TYPE
HOUSING
LENS CONSTRUCTION
BRACKET
LIFESPAN
NET WEIGHT
MOUNTING SUITABLE
WARRANTY

60W LED WORK LAMP

60 WATT
12 x 5W CREE LEDS
3,258 LUMEN
9V-48V DC
-40°C TO +85°C
6500K
DEUTSCH CONNECTOR
ADS12 ALUMINUM
POLYCARBONATE
STAINLESS STEEL
50,000 HOURS
2.4KG
UPRIGHT & PENDANT
3 YEARS



EVWM60LEDEU

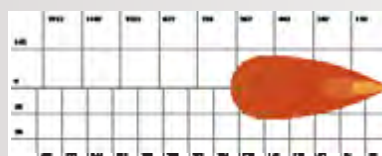

EVWM60LEDWF

EURO BEAM


WIDE FLOOD BEAM

100W LED WORK LAMP

100 WATT
20 x 5W CREE LEDS
5,575 LUMEN
9V-48V DC
-40°C TO +85°C
6500K
DEUTSCH CONNECTOR
ADS12 ALUMINUM
POLYCARBONATE
STAINLESS STEEL
50,000 HOURS
3.0KG
UPRIGHT & PENDANT
3 YEARS



EVWM100LEDEU

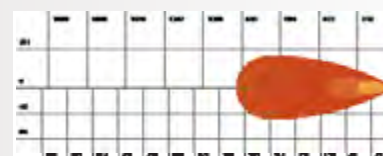

EVWM100LEDWF

WORK MASTER SERIES

WORK MASTER 120W LED LIGHT BAR



3 YEAR WARRANTY
*ON LUMINAIRE



IMPACT RESISTANT



IP69 WATER RESISTANCE



25G RMS VIBRATION



COMPACT DESIGN



AL 6061 HOUSING





HIGH CLARITY OPTICS



ULTRA CLEAR PC LENS



EASY ADJUST LIGHT TILT

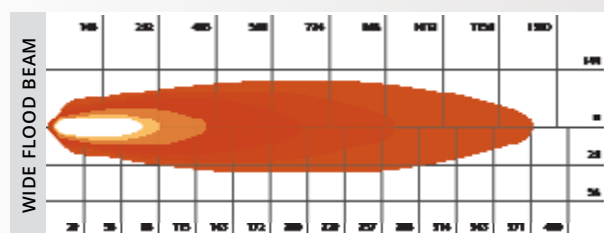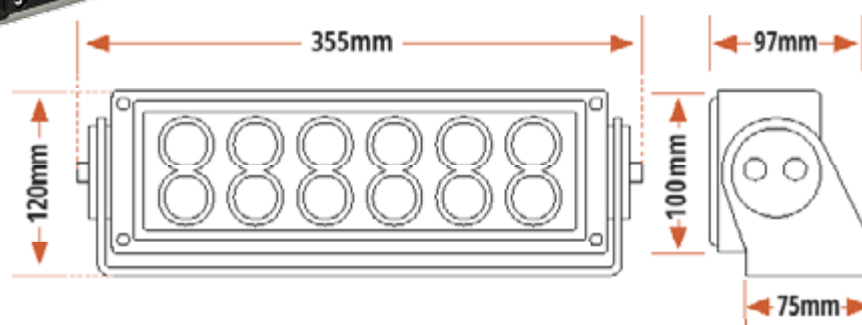

SPECIFICATIONS

WATTAGE	120 WATT
LIGHT SOURCE	12 × 10W CREE LEDS
LIGHT OUTPUT	7,191 LUMEN
VOLTAGE	12V-48V DC
CURRENT DRAW	10A @ 12V/ 5A @ 24V
OPERATING TEMP.	-40°C TO +80°C
COLOUR TEMP.	6000K
HOUSING	DIE-CAST ALUMINIUM
LENS CONSTRUCTION	POLYCARBONATE
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	ALL TYPES
FLOOD BEAM	EVWM120LEDWF

CODES

120W LED LIGHT BAR



HEAVY DUTY WITH IK08 IMPACT RATING
FOR HIGH VIBRATION & HIGH IMPACT AREAS



MADE TO WITHSTAND EXTREME
TEMPERATURES (-45° TO +85°)



WORK BUDDY

HEAVY DUTY WORK RANGE



POLYCARBONATE LENS
SUPER HEAVY DUTY POLYCARBONATE



STRONG ADJUSTABLE BRACKET



WORK BUDDY SERIES

WORK BUDDY 10W LED POD LAMP



3 YEAR WARRANTY
*ON LUMINAIRE





IMPACT RESISTANT



IP68 WATER RESISTANCE



25G RMS VIBRATION

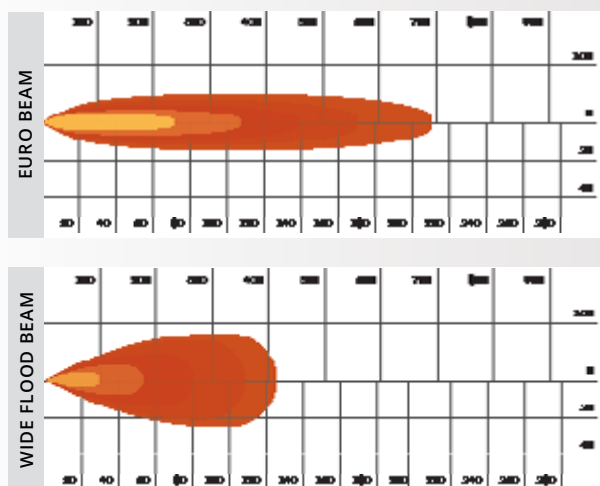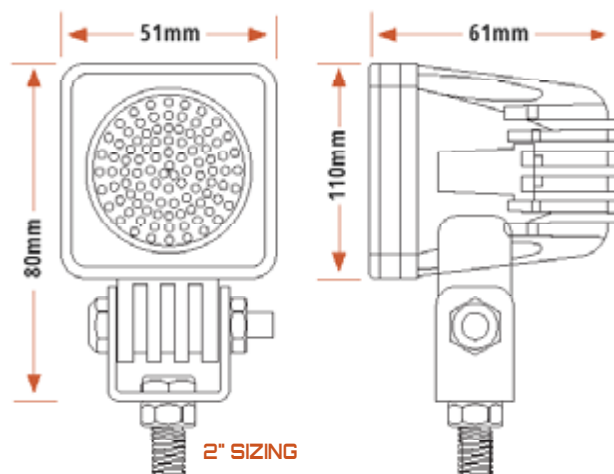

SPECIFICATIONS

WATTAGE	10 WATT
LIGHT SOURCE	1 x 10W CREE LEDS
LIGHT OUTPUT	900 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-40°C TO +85°C
CONNECTOR TYPE	DEUTSCH CONNECTOR
MOUNTING SUITABLE	UPRIGHT & PENDANT
HOUSING	DIECAST ALUMINIUM
LENS CONSTRUCTION	POLYCARBONATE

10W LED POD LAMP


CODES

EURO BEAM	EVWB10LEDEU
FLOOD BEAM	EVWB10LEDWF



WORK BUDDY SERIES

WORK BUDDY 20W LED POD LAMP

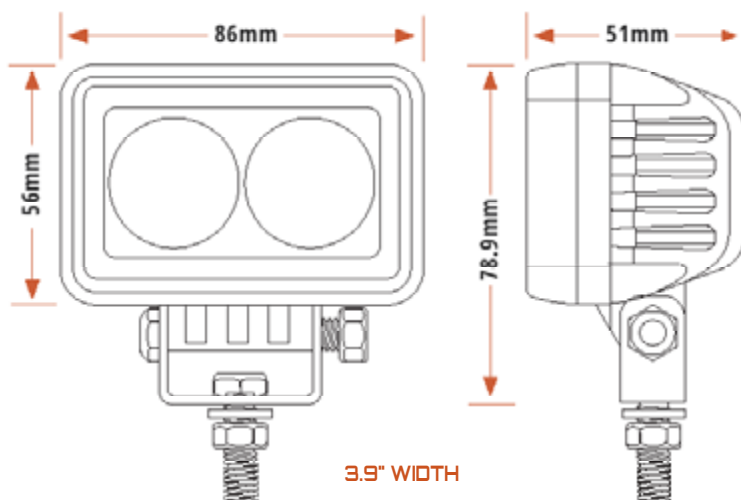

THIS HEAVY GRADE CORROSION RESISTANT LIGHT IS PERFECT FOR WORK AND AGRICULTURAL USAGE.



3 YEAR WARRANTY
*ON LUMINAIRE



0.42KG WEIGHT



IP68 WATER RESISTANCE



25G RMS VIBRATION



SPECIFICATIONS

WATTAGE	20 WATT
LIGHT SOURCE	2 × 10W OSRAM LEDS
LIGHT OUTPUT	1,800 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
CONNECTOR TYPE	DEUTSCH CONNECTOR
MOUNTING SUITABLE	UPRIGHT & PENDANT
HOUSING	DIECAST ALLOY
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	316 STAINLESS STEEL

20W LED POD LAMP

EURO BEAM
FLOOD BEAM

EVWB20LEDEU
EVWB20LEDWF

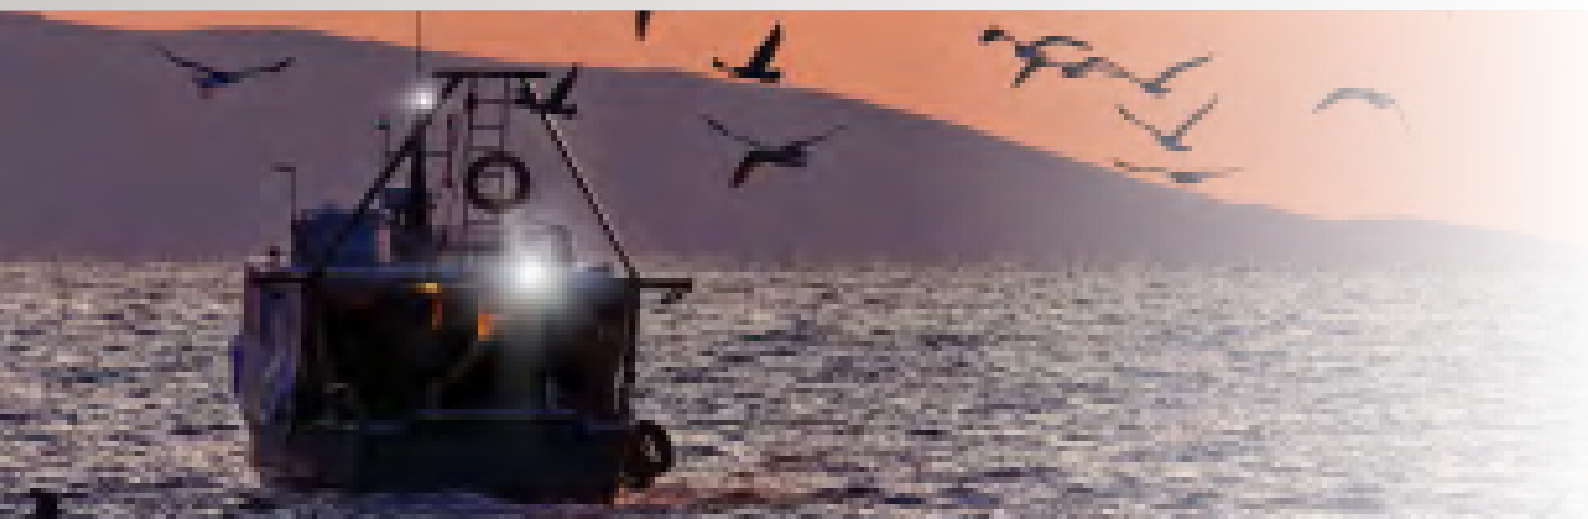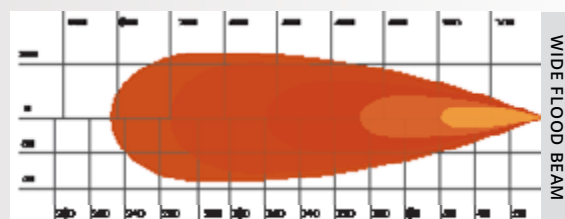

WORK BUDDY SERIES

WORK BUDDY SLIM 30W LED WORK LAMP | FLUSH MOUNT | BRACKET



3 YEAR
WARRANTY
*ON LUMINAIRE



0.5KG
WEIGHT



IP68
WATER
RESISTANCE



25G RMS
VIBRATION



HIGH
CLARITY
OPTICS



COMPACT
DESIGN



ALUMINIUM
HOUSING






ULTRA CLEAR
PC LENS



FLUSH
MOUNT

7.6" WIDTH

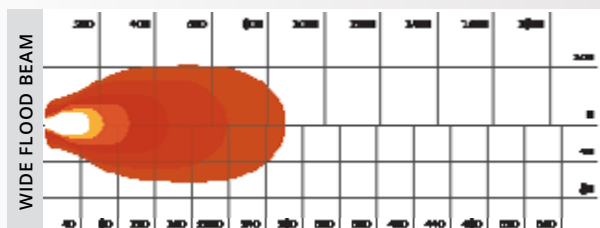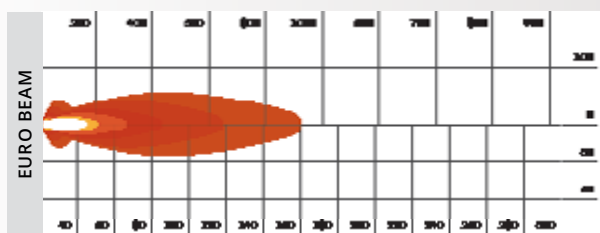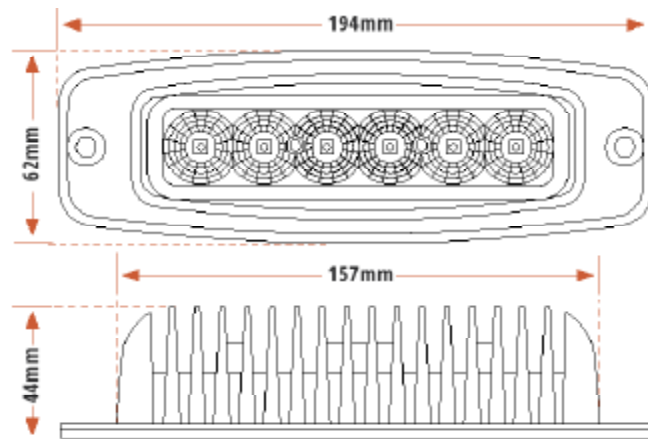

SPECIFICATIONS


WATTAGE	30 WATT
LIGHT SOURCE	6 × 5W CREE LEDs
LIGHT OUTPUT	2,400 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
CONNECTOR TYPE	DEUTSCH CONNECTOR
MOUNTING SUITABLE	FLUSH

30W LED WORK LAMP

CODES

EURO BEAM (FLUSH)	EVWB30LEDEU/F
FLOOD BEAM (FLUSH)	EVWB30LEDWF/F
EURO BEAM (BRACKET)	EVWB30LEDEU
FLOOD BEAM (BRACKET)	EVWB30LEDWF

5.9" WIDTH

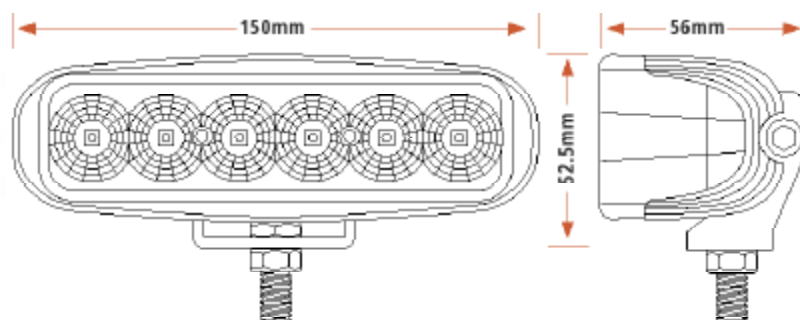

WORK BUDDY SERIES

WORK BUDDY 60W LED WORK LAMP



HIGH CLARITY OPTICS



ULTRA CLEAR PC LENS




ALUMINIUM HOUSING



EASY INSTALLATION



COMPACT DESIGN

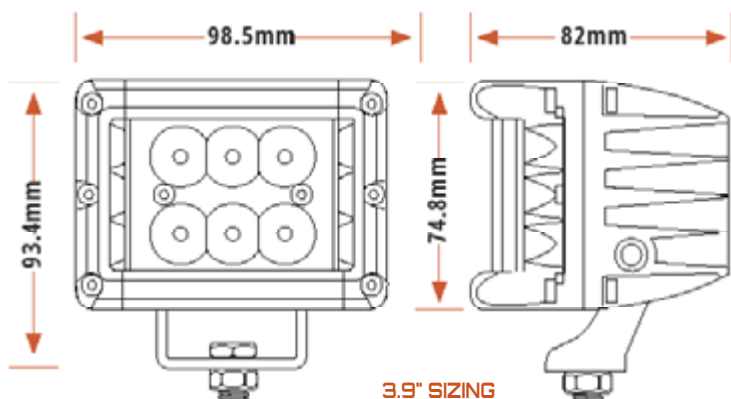

3 YEAR WARRANTY
*ON LUMINAIRE



0.75KG WEIGHT



IP68 WATER RESISTANCE




25G RMS VIBRATION

SPECIFICATIONS

WATTAGE	60 WATT
LIGHT SOURCE	6 × 10W CREE LEDS
LIGHT OUTPUT	5,400 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
CONNECTOR TYPE	DEUTSCH CONNECTOR
MOUNTING SUITABLE	UPRIGHT & PENDANT
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE

60W LED WORK LAMP

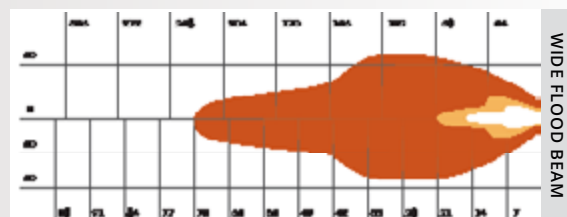

CODES

EURO BEAM	EVWB60LEDEU
EURO BEAM	EVWB60LEDWF



WORK BUDDY SERIES

WORK BUDDY 80W LED WORK LAMP



3 YEAR WARRANTY
*ON LUMINAIRE





1.35KG WEIGHT



IP68 WATER RESISTANCE



25G RMS VIBRATION

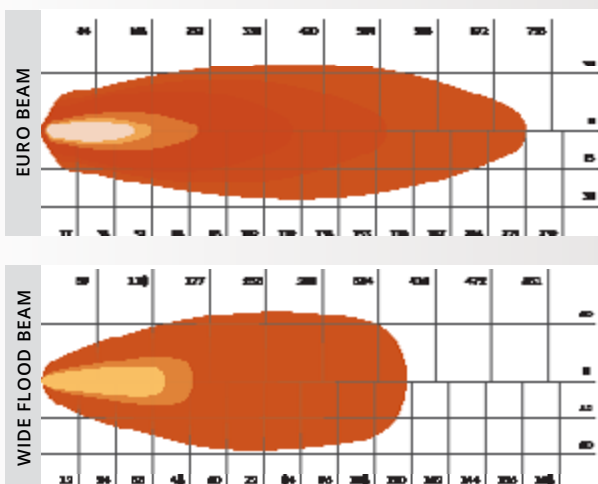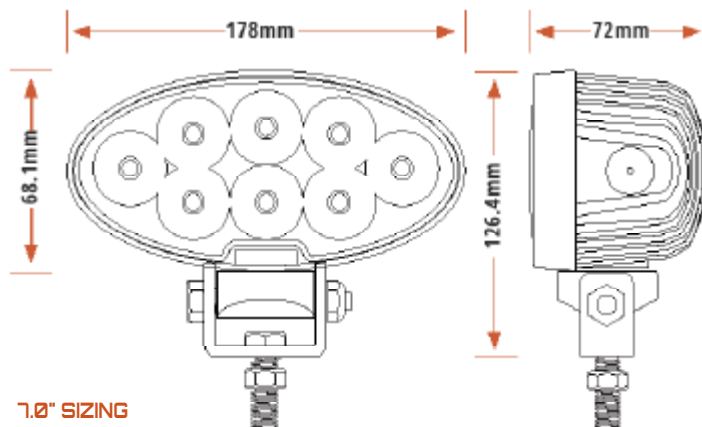

SPECIFICATIONS

WATTAGE	80 WATT
LIGHT SOURCE	8 × 10W CREE LEDS
LIGHT OUTPUT	7,200 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-40°C TO +85°C
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
BRACKET	S304 STAINLESS STEEL
CONNECTOR TYPE	DEUTSCH CONNECTOR
MOUNTING SUITABLE	ALL TYPES


CODES

EURO BEAM	EVWB80LEDEU
FLOOD BEAM	EVWB80LEDWF



WORK BUDDY SERIES

WORK BUDDY 27W LED WORK LAMP | ROUND

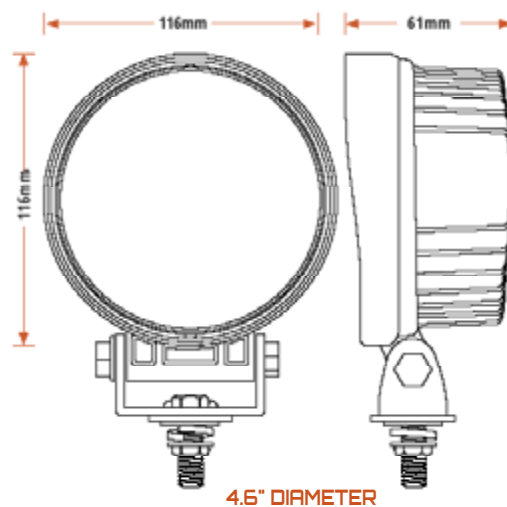

2 YEAR WARRANTY
*ON LUMINAIRE



0.9KG WEIGHT



IP67 WATER RESISTANCE




8G RMS VIBRATION

SPECIFICATIONS

WATTAGE	27 WATT
LIGHT SOURCE	9 × 3W CREE LEDS
LIGHT OUTPUT	1,250 +/- 150 LUMEN
VOLTAGE	12V-36V DC
COLOUR TEMP.	5700-6500K
OPERATING TEMP.	-40°C TO +80°C
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	ALL TYPES
HOUSING	DIE-CAST ALLOY
LENS	POLYCARBONATE
BRACKET	STAINLESS STEEL
FLOOD BEAM (ROUND)	EVWB27LEDWF/R

27W LED WORK LAMP

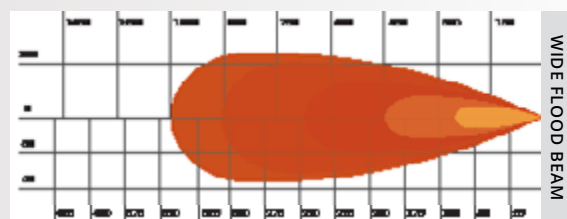

CODES



WORK BUDDY SERIES

WORK BUDDY 27W LED WORK LAMP | SQUARE



2 YEAR WARRANTY
*ON LUMINAIRE



0.9KG WEIGHT



IP67 WATER RESISTANCE



8G RMS VIBRATION



HIGH CLARITY OPTICS



AL 6061 HOUSING




EASY ADJUST LIGHT TILT



PLUG & PLAY DEUTSCH PIN




EASY INSTALLATION

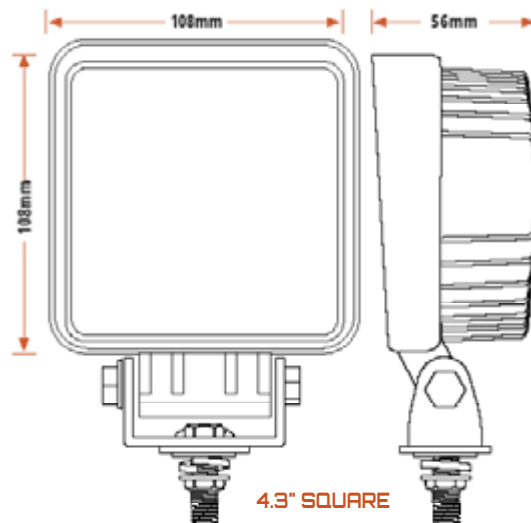

SPECIFICATIONS



WATTAGE	27 WATT
LIGHT SOURCE	9 × 3W CREE LEDS
LIGHT OUTPUT	1,500 +/- 150 LUMEN
VOLTAGE	12V-36V DC
COLOUR TEMP.	5700-6500K
OPERATING TEMP.	-40°C TO +80°C
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	ALL TYPES
HOUSING	DIE-CAST ALLOY
LENS	POLYCARBONATE
BRACKET	STAINLESS STEEL
FLOOD BEAM (SQUARE)	EVWB27LEDWF/S

CODES

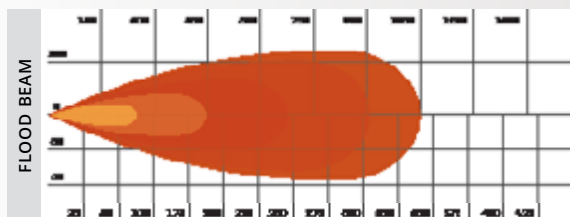

WORK BUDDY SERIES

WORK BUDDY 16W LED LAMP | SQUARE

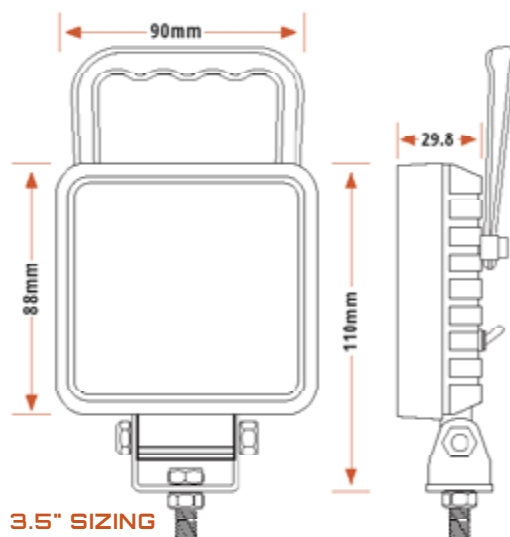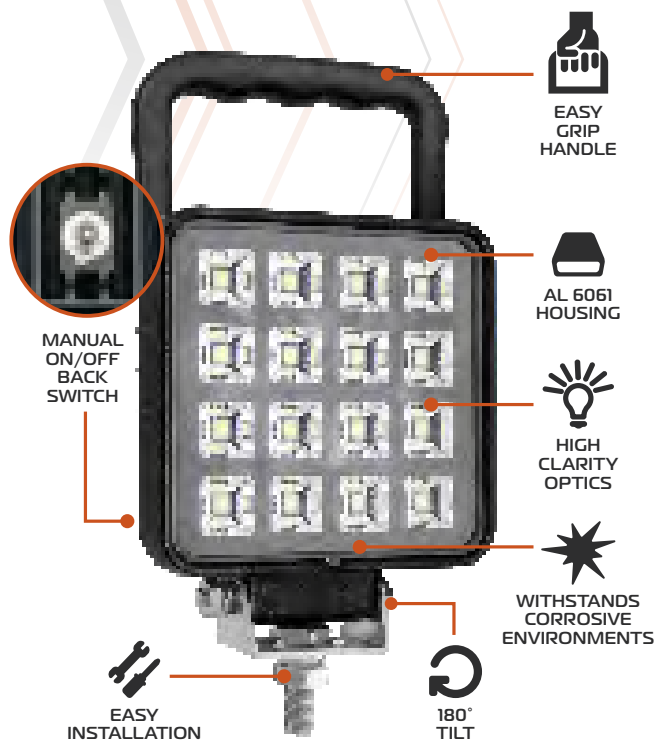

3 YEAR WARRANTY
*ON LUMINAIRE



0.44KG WEIGHT



IP68 WATER RESISTANCE




25G RMS VIBRATION

SPECIFICATIONS

WATTAGE	16W WATT
LIGHT SOURCE	16 × 1W OSRAM LEDS
LIGHT OUTPUT	1,080 LUMEN
VOLTAGE	9V-32V DC
CURRENT DRAW	8.3A @12V
OPERATING TEMP.	-45°C TO +85°C
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	UPRIGHT & PENDANT
FLOOD BEAM (SQUARE)	EVWB16LEDWF/S

16W LED FLOOR LAMP

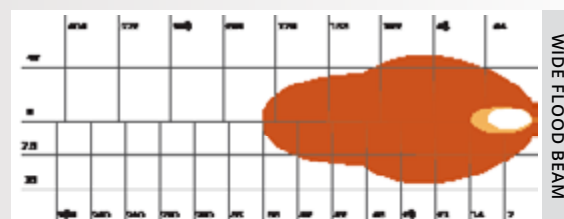

WORK BUDDY SERIES

WORK BUDDY 24W LED LAMP | ROUND



3 YEAR WARRANTY
*ON LUMINAIRE



0.67KG WEIGHT



IP68 WATER RESISTANCE



25G RMS VIBRATION



EASY GRIP HANDLE



AL 6061 HOUSING




HIGH CLARITY OPTICS



WITHSTANDS CORROSIVE ENVIRONMENTS





180° TILT



MANUAL ON/OFF BACK SWITCH



EASY INSTALLATION

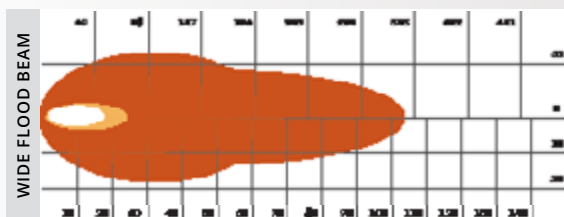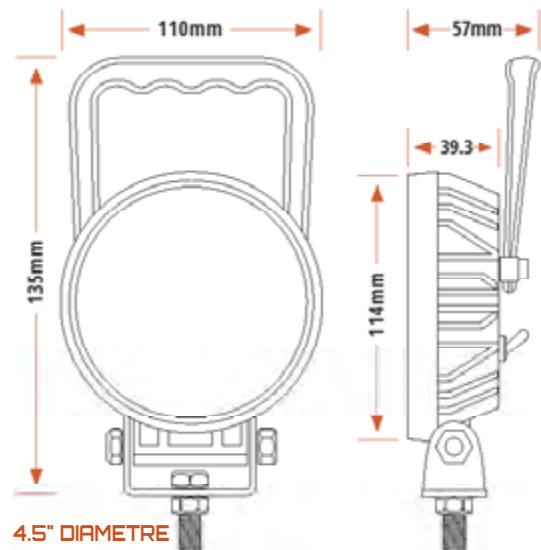


SPECIFICATIONS

WATTAGE	24W WATT
LIGHT SOURCE	24 × 1W OSRAM LEDS
LIGHT OUTPUT	1,920 LUMEN
VOLTAGE	9V-32V DC
CURRENT DRAW	8.3A @12V
OPERATING TEMP.	-45°C TO +85°C
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	UPRIGHT & PENDANT
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
FLOOD BEAM (ROUND)	EVWB27LEDWF/R


CODES

24W LED FLOOR LAMP

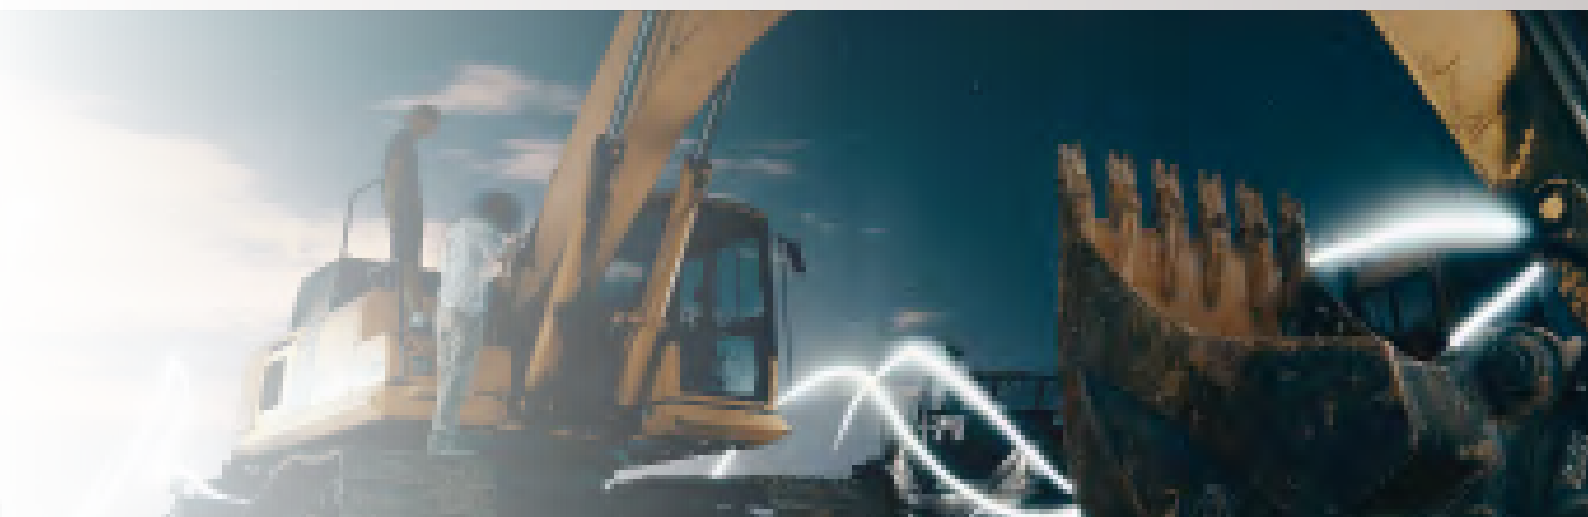

WORK BUDDY SERIES

WORK BUDDY 30W LED FOGLIGHT INSERT FOR MOTORCYCLE/ SCOOTER

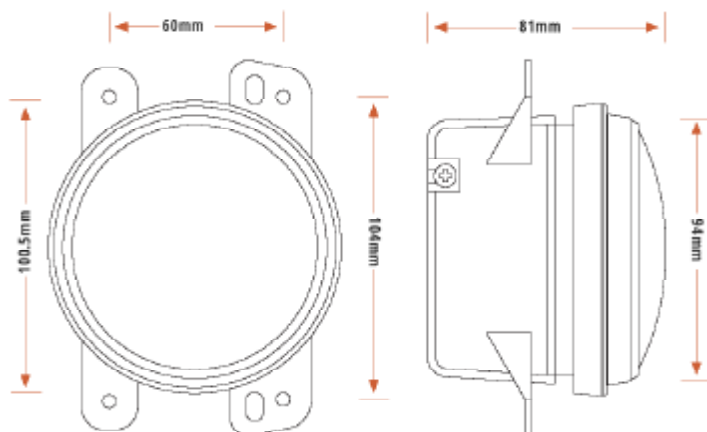

3.4" SIZING



3 YEAR WARRANTY
*ON LUMINAIRE



6000K MOTORBIKE
COMPATIBLE



IP68 WATER
RESISTANCE



25G RMS
VIBRATION


SPECIFICATIONS

WATTAGE	30 WATT
LIGHT SOURCE	CREE XTE LED
LIGHT OUTPUT	2,700 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
COLOUR TEMP.	6000K
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
CONNECTOR TYPE	5 WIRE
MOUNTING SUITABLE	FLUSH

30W LED FOG LIGHT

CODES

FOG BEAM	EVWB30LEDFL
FOG BEAM (X BRACKET)	EVWB30LEDFL/B

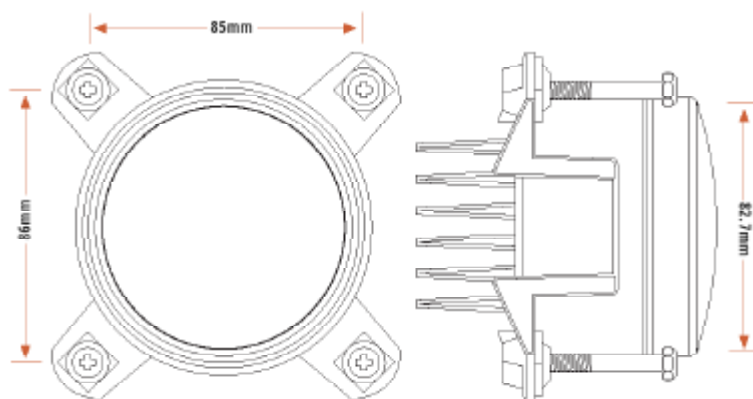

3.3" SIZING



WORK BUDDY SERIES

WORK BUDDY 73W LED ROUND HEADLIGHT



3 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP68 WATER RESISTANCE



25G RMS VIBRATION



SHOCK & VIBRATION RESISTANT PC LENS

PLUG & PLAY EASY INSTALLATION


HIGH CLARITY OPTICS



INTEGRATED HIGH & LOW BEAMS FOR SAFETY & COMFORT



AL 6061 HOUSING

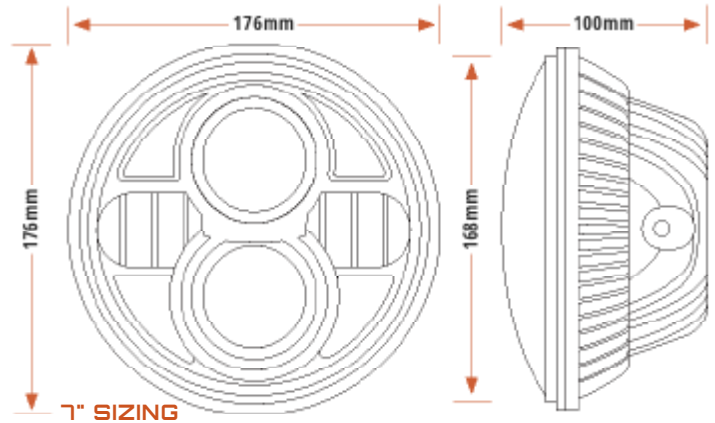

SPECIFICATIONS

WATTAGE	73 WATT
LIGHT SOURCE	CREE XTE+XBD LED
LIGHT OUTPUT	6,570 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
COLOUR TEMP.	6000 - 6500K DAYLIGHT BLUE
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
CONNECTOR TYPE	H4 PLUG
MOUNTING SUITABLE	FLUSH
CODES	EVWB73LEDHL

73W LED HEAD LIGHT




WORK BUDDY SERIES

WORK BUDDY 82W WORK LAMP SET



IDEAL REPLACEMENT HEADLIGHT FOR AGRICULTURAL & CONSTRUCTION MACHINERY - WITHSTANDS HEAVY VIBRATION, CORROSION, MOISTURE & DUST

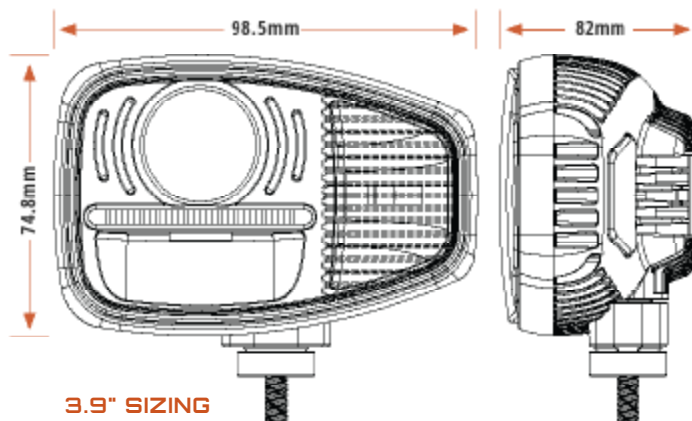

3 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP68 WATER RESISTANCE



25G RMS VIBRATION

SPECIFICATIONS

WATTAGE	30W LO/ 60W HI / 12W TURNING
LIGHT SOURCE	16 x CREE LED
LIGHT OUTPUT	8,100 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
BRACKET	S304 STAINLESS STEEL
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	UPRIGHT
LEFT & RIGHT SET	EVWB82LEDST

82W LED LAMP SET

CODES



FIREBLADE MAXX SERIES

HIGH PERFORMANCE SPOT BEAM DRIVING LIGHT FOR TRACTORS



3 YEAR WARRANTY
*ON LUMINAIRE





LOW POWER DRAW



IP68 WATER RESISTANCE



SUPER BRIGHT

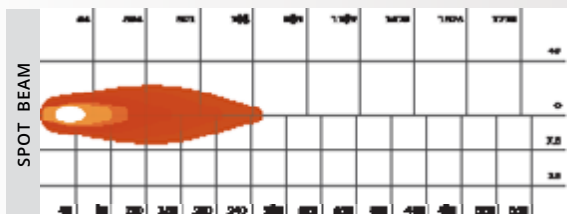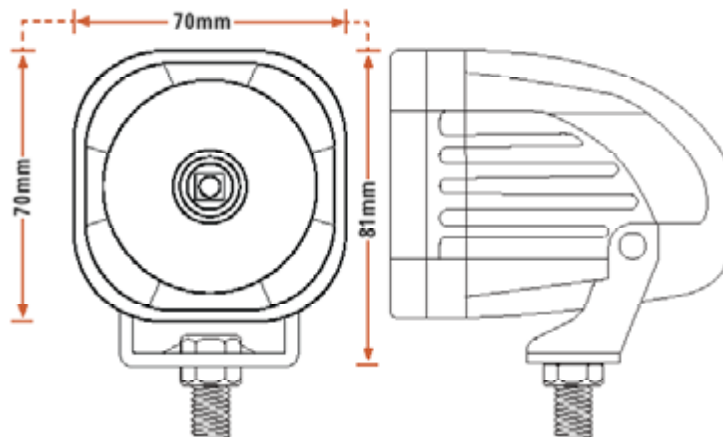

SPECIFICATIONS

WATTAGE	25 WATT
LIGHT SOURCE	CREE LED
LIGHT OUTPUT	2,250 LUMEN
VOLTAGE	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
BRACKET	304 STAINLESS STEEL
LIFESPAN	30,000 HOURS
NET WEIGHT	0.5 KG
CONNECTOR TYPE	DEUTSCH CONNECTOR
MOUNTING SUITABLE	UPRIGHT

82W LED LAMP SET

LEFT & RIGHT SET



EVWB82LEDST

CODES



WORK BUDDY SERIES

EARTH VISION 5W LED FORKLIFT SAFETY LAMP

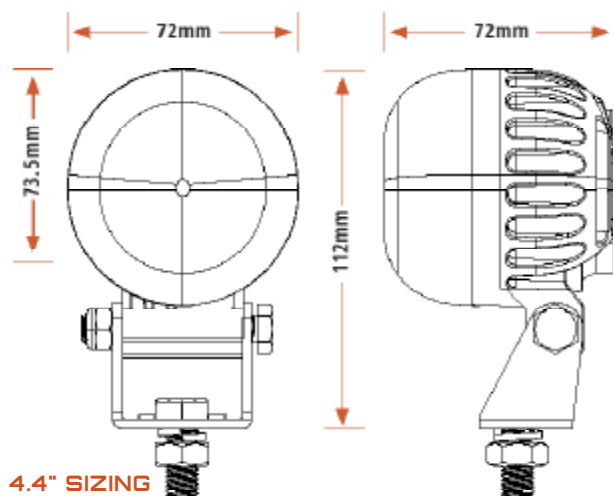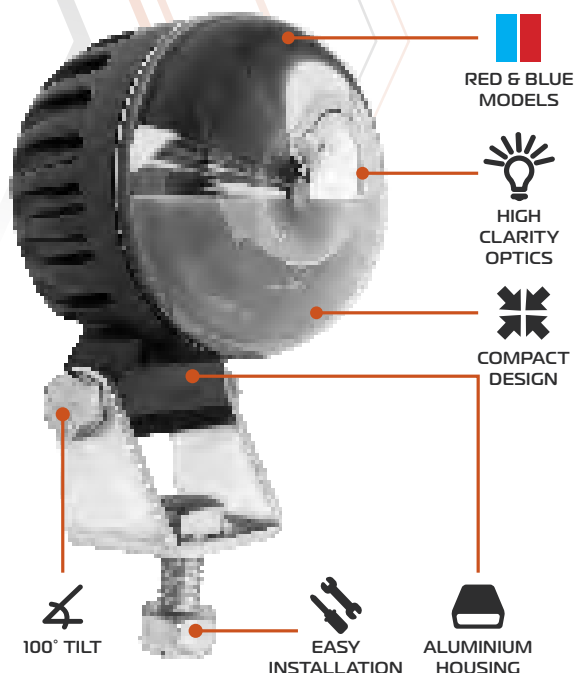

3 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP68 WATER RESISTANCE



25G RMS VIBRATION

SPECIFICATIONS


WATTAGE	5 WATT
LIGHT SOURCE	5W LUMINOUS LED
LIGHT OUTPUT	RED/ BLUE ARC
VOLTAGE	9V- 110V DC
OPERATING TEMP.	-45°C TO +85°C
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	UPRIGHT & PENDANT

5W LED FORKLIFT SAFETY LAMP

RED ARC BEAM
BLUE ARC BEAM

EVSL5LED-CLR
EVSL5LED-CLB

CODES

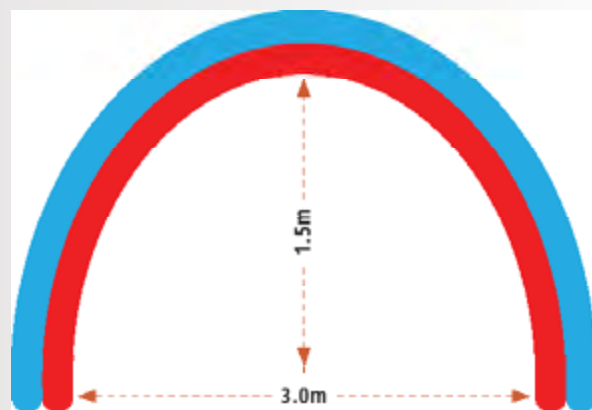

WORK BUDDY SERIES

EARTH VISION 20W LED FORKLIFT LIGHT



**3 YEAR
WARRANTY**
*ON LUMINAIRE




**LOW POWER
DRAW**



**IP68 WATER
RESISTANCE**



**25G RMS
RATED**

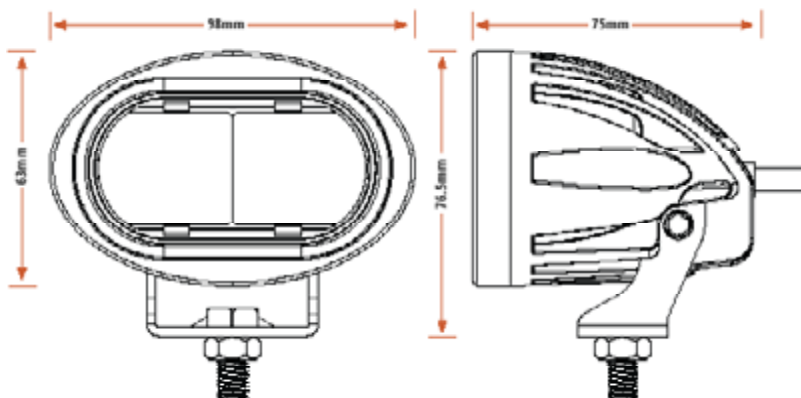

3.9" SIZING

A HIGH LUX LEVEL - HIGHLY VISIBLE FORKLIFT SAFETY LIGHT SOLUTION



SPECIFICATIONS

WATTAGE	20 WATT
LIGHT SOURCE	2 × LUMINOUS SST-10 LEDS
LIGHT OUTPUT	RED LINEAR
VOLTAGE	9V-110V DC
OPERATING TEMP.	-45°C TO +85°C
HOUSING	ALUMINIUM ALLOY
LENS	POLYCARBONATE
BRACKET	S304 STAINLESS STEEL
CONNECTOR TYPE	DEUTSCH DT 2 PIN
MOUNTING SUITABLE	UPRIGHT & PENDANT
RED LINEAR BEAM	EVSL20LED-RL



20W FORKLIFT SAFETY LAMP

CODES



WORK BUDDY SERIES

EARTH VISION AMBER BEACON

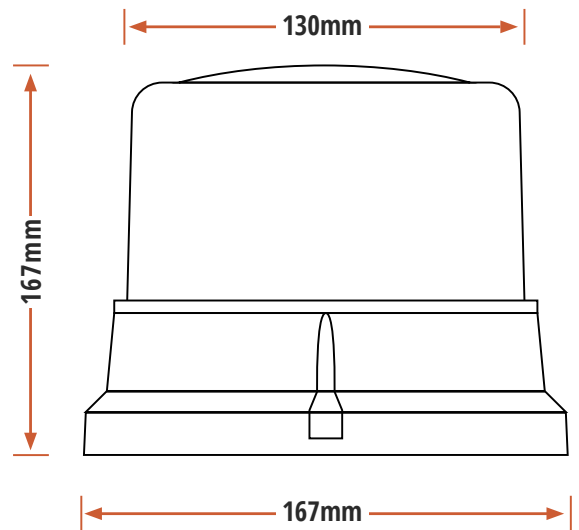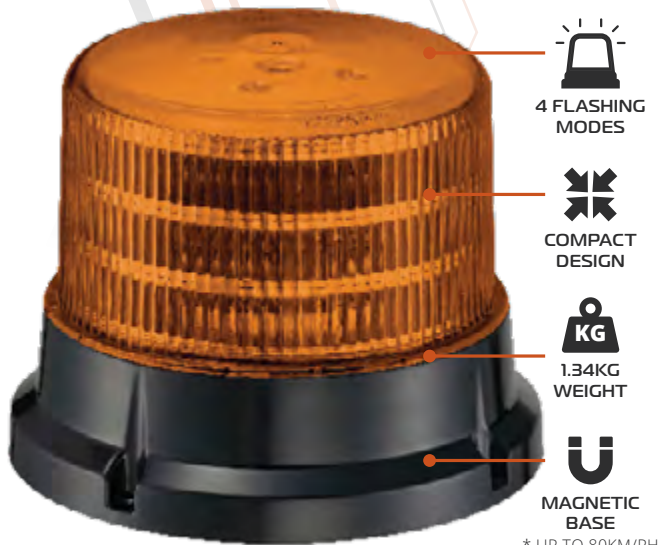

2 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP67 WATER RESISTANCE



25G RMS VIBRATION


SPECIFICATIONS

WATTAGE	18W AVER./ 48W PEAK
LIGHT SOURCE	PCS SMD LED
MOUNT	MAGNET/ BOLT/ SURFACE MOUNT
APPROVALS	ECE R65/R10 (EMC)/SAE CLASS 1
VOLTAGE	10-30V
CURRENT CONSUMPTION	40W/ AVERAGE 18W
OPERATING TEMP.	-40°C TO +65°C
LENS COLOUR	CLEAR & AMBER
SEALING	0.5M
INSTALLATION	PLUG-IN PLAY

18W AMBER BEACON


CODES

EVSL48LEDAB (AMBER) | EVSL48LEDBB (BLUE) |
EVSLEDWB (WHITE) | EVSL48LEDRB (RED) | EVSL48LEDWB (SHORT AMBER)

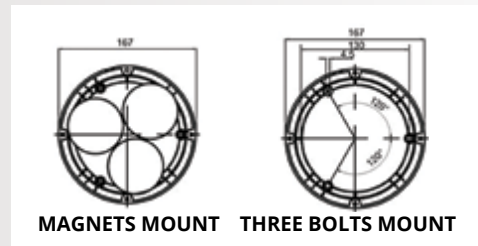


FLASH PATTERNS (PER MINUTE)

DOUBLE	74
TRIPLE	76
QUAD	75
ROTATE	143

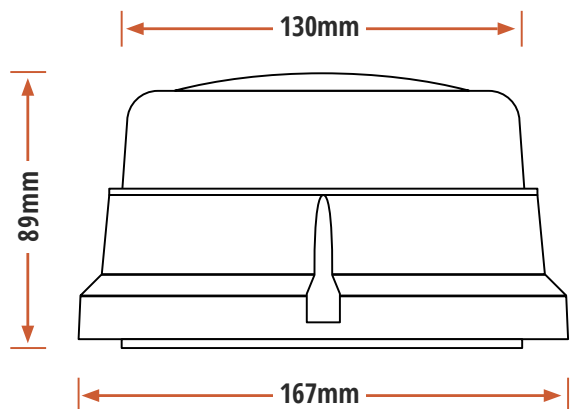



LIGHT BARS

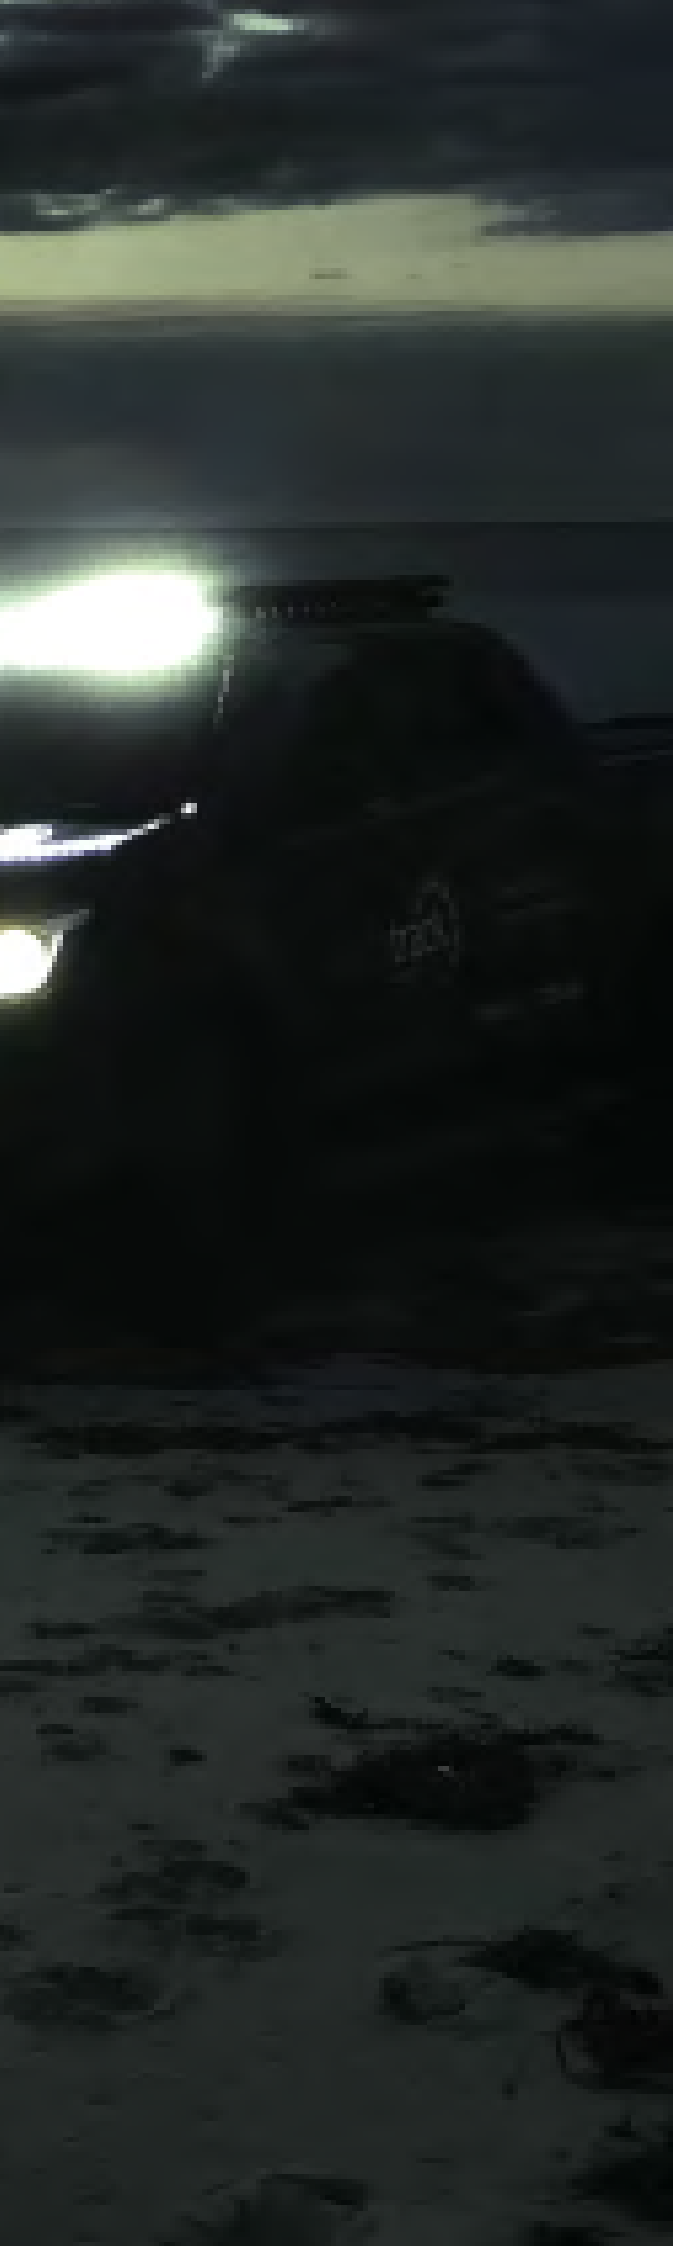

SABRE SERIES 33

SABRE SLIMLINE 34

SABRE DUAL LINE 37


SABRE CURVED 38

SABRE LASER SERIES 40

SABRE LASER DUAL LINE 41




 SLIMLINE RANGE

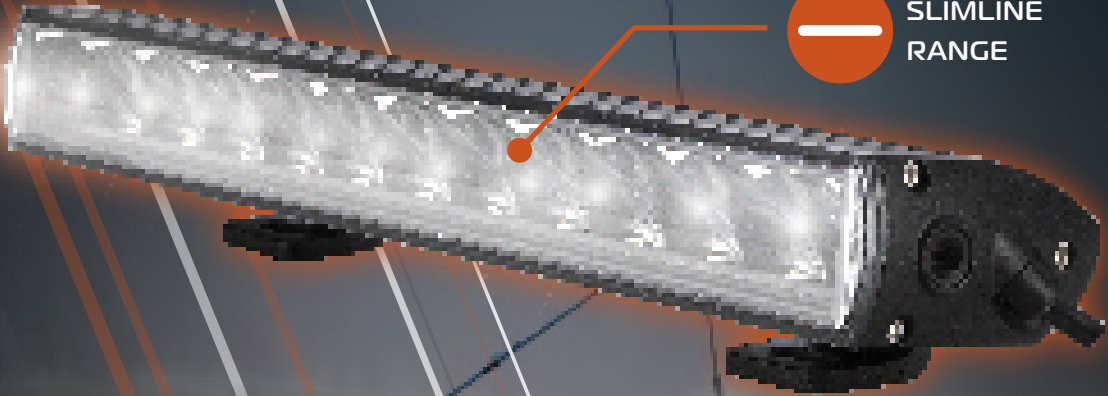

SABRE SERIES

ALL TERRAIN LIGHT BARS



 DUAL LINE RANGE


 CURVED RANGE



 SIDE REFLECTIVE OPTICS

 UV & SHOCK RESISTANT



 ADVANCED COOLING SYSTEM BREATHER FILTERS

SIDE & REAR FINS EFFICIENTLY DISPERSE HEAT, KEEPING THE LIGHTS COOL & WORKING OPTIMALLY.

 SLIDING MOUNTS

SABRE SERIES


SABRE SLIMLINE LIGHT BAR RANGE



A EVSS90LED (20.2")



B EVSS135LED (29.8")

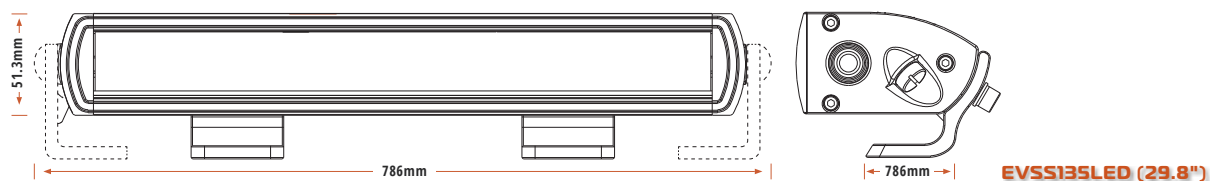

* SIZING WITH OPTIONAL SIDE BRACKET

SABRE SERIES

SABRE SLIMLINE LIGHT BAR RANGE



EVSS90LED | 20.2"




EVSS135LED | 29.8"

SPECIFICATIONS

WATTAGE	90 WATT
LIGHT SOURCE	18 x 5W LG LEDS
LIGHT OUTPUT	8,100 LUMEN
VOLTAGE	9V-36V DC
OPERATING TEMP.	-40°C TO +60°C
IP RATING	IP68
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	6063 EXTRUDED ALUMINUM HEAT-SINK
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	1.13 KG
MOUNTING SUITABLE	UPRIGHT SIDE & BACK OPTIONS
WARRANTY	3 YEARS


SINGLE SLIMLINE 90W LIGHT BAR

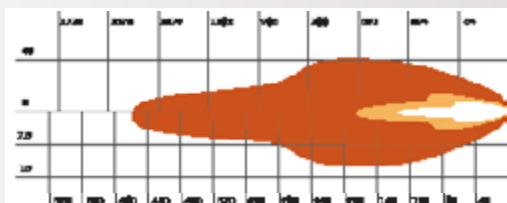

BEAM
CODES
EVSS90LED

WATTAGE	135 WATT
LIGHT SOURCE	27 x 5W LG LEDS
LIGHT OUTPUT	12,200 LUMEN
VOLTAGE	9V-36V DC
OPERATING TEMP.	-40°C TO +60°C
IP RATING	IP68
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	6063 EXTRUDED ALUMINUM HEAT-SINK
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	1.88 KG
MOUNTING SUITABLE	UPRIGHT SIDE & BACK OPTIONS
WARRANTY	3 YEARS

SINGLE SLIMLINE 135W LIGHT BAR

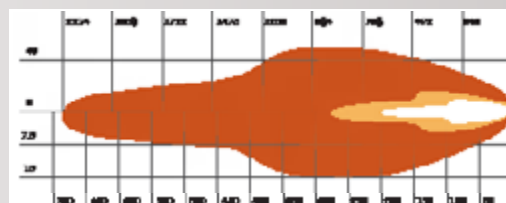

BEAM
CODES
EVSS135LED

SABRE SERIES

SABRE DUAL LINE LIGHT BAR RANGE



3 YEAR
WARRANTY
*ON LUMINAIRE



SIDE REFLECTIVE
OPTICS



IP68 WATER
RESISTANCE



CORROSION &
RUST RESISTANT



SUPER
BRIGHT



SUPERIOR
HEAT
DISSIPATION



SIDE &
BOTTOM
BRACKET
FITTINGS



EASY
TILT
ADJUST



EASY
INSTALLATION



ANODISED
POLYESTER
POWDERCOAT



UV/ SHOCK
RESISTANT



ULTRA CLEAR
LENS




ALUMINIUM
HOUSING



A EVSD120LED | 14.2"

B EVSD180LED | 20.6"

* BACK BRACKET SIZING

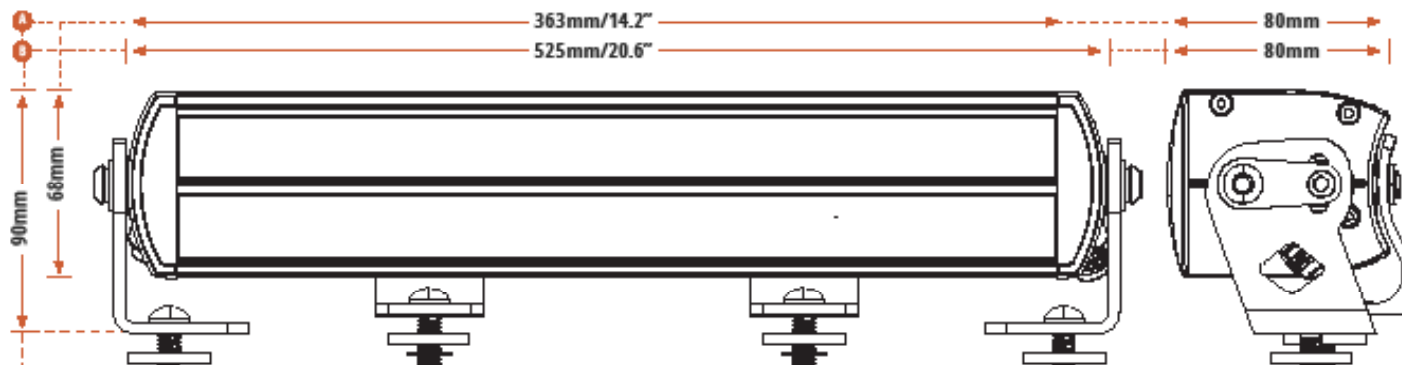

SABRE SERIES

SABRE DUAL LINE LIGHT BAR RANGE



EVSD120LED | 14.2"




EVSD180LED | 20.6"

SPECIFICATIONS


WATTAGE	120 WATT
LIGHT SOURCE	24 × 5W LG LEDS
LIGHT OUTPUT	10,900 LUMEN
VOLTAGE	9V-36V DC
AMP DRAW	6.9A/3.4A
OPERATING TEMP.	-40°C TO +60°C
COLOUR TEMP.	6000K
IP RATING	IP68
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	6063 EXTRUDED ALUMINUM HEAT-SINK
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	2.2 KG
MOUNTING SUITABLE	SIDE AND BOTTOM OPTIONS
WARRANTY	
BEAM	DRIVING SPOT
CODES	EVSD120LED

DUAL LINE 120W LIGHT BAR

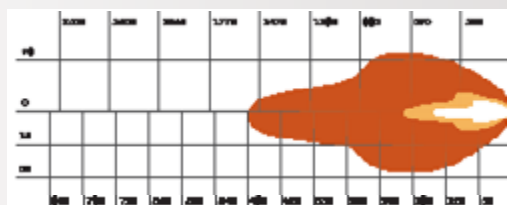

DUAL LINE 180W LIGHT BAR

180 WATT
36 × 5W LG LEDS
16,400 LUMEN
9V-36V DC
12.5A/5.9A
-40°C TO +60°C
6000K
IP68
DEUTSCH CONNECTOR
6063 EXTRUDED ALUMINUM HEAT-SINK
POLYCARBONATE
STAINLESS STEEL
50,000 HOURS
2.9 KG
SIDE AND BOTTOM OPTIONS
DRIVING SPOT
EVSD180LED

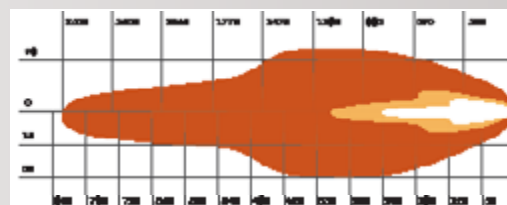

SABRE SERIES

SABRE CURVED LIGHT BAR RANGE



3 YEAR WARRANTY
*ON LUMINAIRE



SIDE REFLECTIVE OPTICS



IP68 WATER RESISTANCE



CORROSION & RUST RESISTANT



EASY TILT ADJUST



40% BRIGHTER



UV / SHOCK RESISTANT



SUPER BRIGHT



EASY INSTALLATION



CURVED DESIGN FOR A STREAMLINED FINISH




ULTRA CLEAR LEXAN PC FRONT COVER



EXTRUDED ALUMINIUM FOR SUPERIOR HEAT-SINK

A EVSC100LED | 20.6"

B EVSC220LED | 43.3"

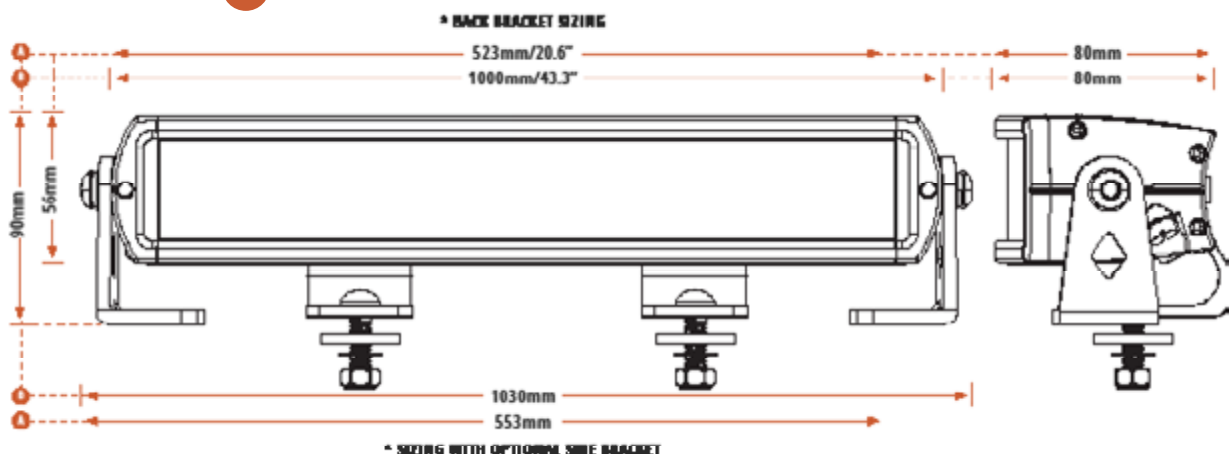

SABRE SERIES

SABRE CURVED LIGHT BAR RANGE



SPECIFICATIONS


WATTAGE	100 WATT
LIGHT SOURCE	10 × 10W ETI LEDS
LIGHT OUTPUT	9,500 LUMEN
VOLTAGE	9V-36V DC
AMP DRAW	6.5A/3.1A
OPERATING TEMP.	-40°C TO +60°C
IP RATING	IP68
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	6063 EXTRUDED ALUMINUM HEAT-SINK
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	2.25 KG
MOUNTING SUITABLE	UPRIGHT STANDARD SIDE/ SLIDEABLE
WARRANTY	3 YEARS
BEAM	SPOT
CODES	EVSC100LED


SLIMLINE 45W CURVED LIGHT BAR



SLIMLINE 60W CURVED LIGHT BAR

220 WATT
22 × 10W ETI LEDS
20,900 LUMEN
9V-36V DC
14.2A/6.8A
-40°C TO +60°C
IP68
DEUTSCH CONNECTOR
6063 EXTRUDED ALUMINUM HEAT-SINK
POLYCARBONATE
STAINLESS STEEL
50,000 HOURS
4.65 KG
UPRIGHT STANDARD SIDE/ SLIDEABLE
3 YEARS
SPOT
EVSC220LED

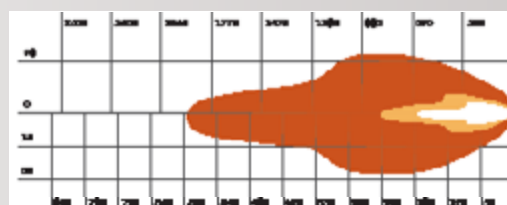

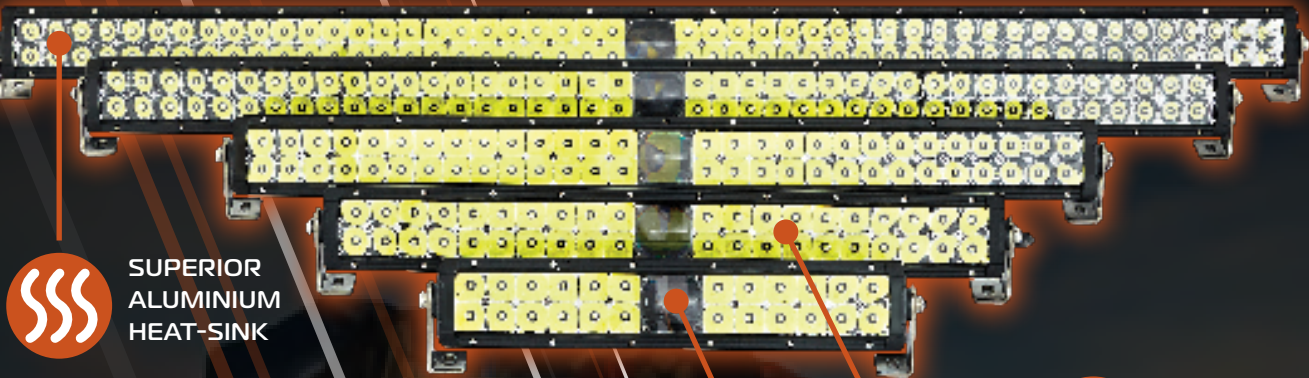

SUPERIOR
ALUMINIUM
HEAT-SINK



MULTIPLE SIZES TO
FIT MOST VEHICLES

SABRE LASER


COMBINATION BEAM LASER LIGHT BARS



INTENSE DISTANCE
LASER BEAM



DRL
FUNCTION

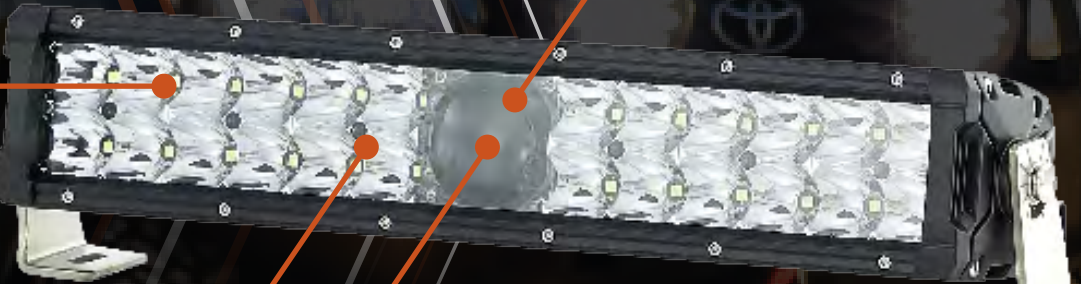

COMBINATION BEAM
LASER + WIDE FLOOD



HEAVY DUTY
STAINLESS STEEL
BRACKETS




HIGH PERFORMANCE
GERMAN MADE
OSRAM LEDS



SABRE LASER SERIES

LASER + LED LIGHT BAR RANGE

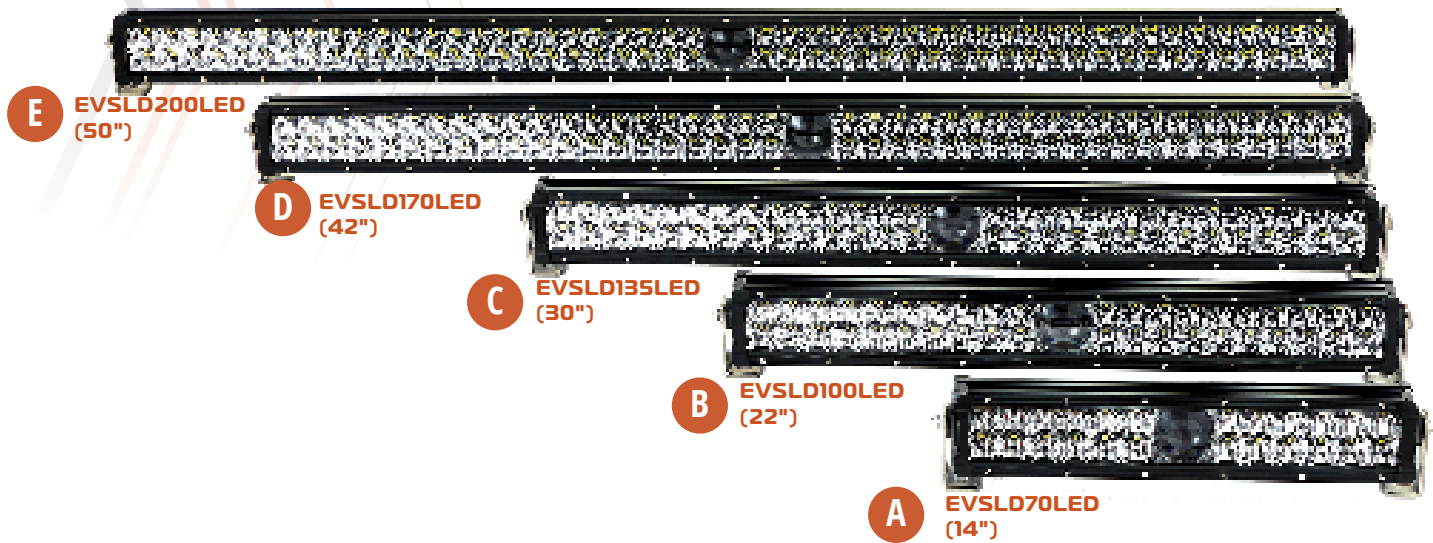

3 YEAR WARRANTY
*ON LUMINAIRE




LONG RANGE BEAM



IP67 WATER RESISTANCE



COMBINATION LASER + LED

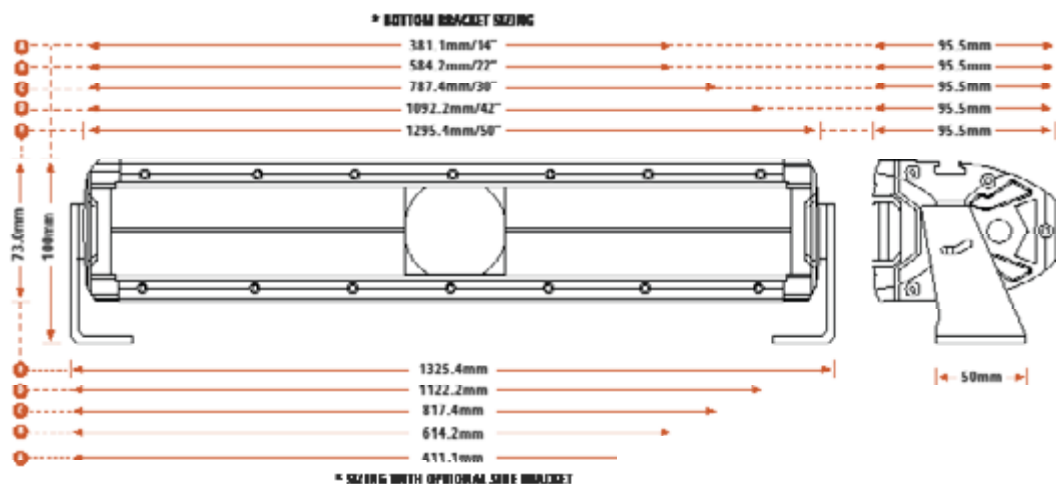

SABRE LASER SERIES

LASER + LED LIGHT BAR RANGE | DUAL LINE



3 YEAR
WARRANTY
*ON LUMINAIRE



LONG RANGE
BEAM



IP67 WATER
RESISTANCE



COMBINATION
LASER + LED



EVSLD100LED | 22"

EVSLD70LED | 14"

SPECIFICATIONS

WATTAGE	70 WATT
LIGHT SOURCE	OSRAM P9 LEDS + LASER
LIGHT OUTPUT	8,000 LUMEN
VOLTAGE	10V-30V DC
OPERATING TEMP.	-40°C TO +60°C
COLOUR TEMP.	6000K
IP RATING	IP67
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	DIECAST ALUMINUM ALLOY
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	2.13 KG
MOUNTING SUITABLE	UPRIGHT
WARRANTY	3 YEARS

DUAL 70W LASER LIGHT BAR



BEAM
LASER + FLOOD

CODES
EVSLD70LED

DUAL 100W LASER LIGHT BAR

WATTAGE	100 WATT
LIGHT SOURCE	OSRAM P9 LEDS + LASER
LIGHT OUTPUT	12,900 LUMEN
VOLTAGE	10V-30V DC
OPERATING TEMP.	-40°C TO +60°C
COLOUR TEMP.	6000K
IP RATING	IP67
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	DIECAST ALUMINUM ALLOY
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	50,000 HOURS
NET WEIGHT	3.2 KG
MOUNTING SUITABLE	UPRIGHT
WARRANTY	3 YEARS



BEAM
LASER + FLOOD

CODES
EVSLD100LED


SABRE LASER SERIES

LASER + LED LIGHT BAR RANGE | DUAL LINE



DUAL 135W LASER LIGHT BAR


135 WATT
OSRAM P9 LEDS + LASER
20,000 LUMEN
10V-30V DC
-40°C TO +60°C
6000K
IP67
DEUTSCH CONNECTOR
DIECAST ALUMINUM ALLOY
POLYCARBONATE
STAINLESS STEEL
50,000 HOURS
4.0 KG
UPRIGHT
3 YEARS

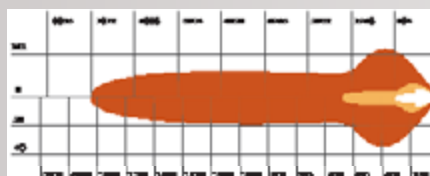

LASER + FLOOD
EVSLD135LED

DUAL 170W LASER LIGHT BAR


170 WATT
OSRAM P9 LEDS + LASER
23,000 LUMEN
10V-30V DC
-40°C TO +60°C
6000K
IP67
DEUTSCH CONNECTOR
DIECAST ALUMINUM ALLOY
POLYCARBONATE
STAINLESS STEEL
50,000 HOURS
5.15 KG
UPRIGHT
3 YEARS

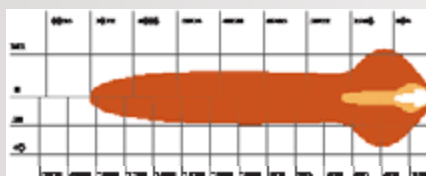

LASER + FLOOD
EVSLD170LED

DUAL 200W LASER LIGHT BAR

200 WATT
OSRAM P9 LEDS + LASER
29,000 LUMEN
10V-30V DC
-40°C TO +60°C
6000K
IP67
DEUTSCH CONNECTOR
DIECAST ALUMINUM ALLOY
POLYCARBONATE
STAINLESS STEEL
50,000 HOURS
6.0 KG
UPRIGHT
3 YEARS

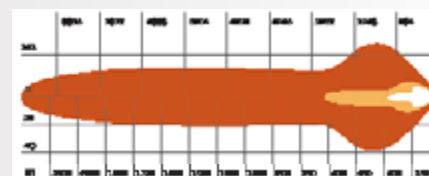

LASER + FLOOD
EVSLD200LED



DRIVING LIGHTS



FIREBLADE SERIES 47

FIREBLADE MAXX SERIES 50

FIREBLADE LASER SERIES 53

PROTECTIVE LENS
COVER INCLUDED



TOUGH FOR HARSH
ENVIRONMENTS




15G RMS
VIBRATION
RATING

FIRE BLADE

SUPER BRIGHT DRIVING SPOT LIGHTS



PROJECTOR OPTICS FOR
LONG RANGE LIGHTING

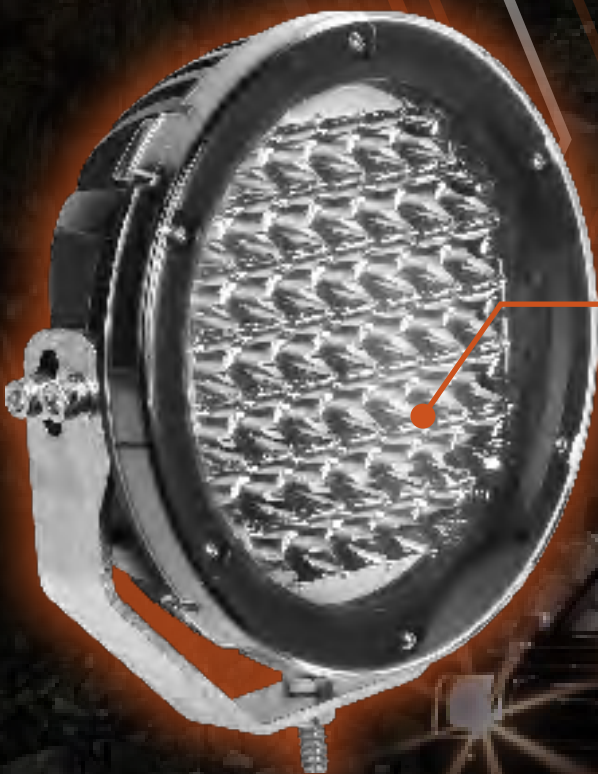

ADVANCED COOLING SYSTEM
BREATHER FILTERS



FIREBLADE SERIES

FIREBLADE DRIVING SPOT LIGHT RANGE



3 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP67 WATER RESISTANCE



SPOT BEAM




A EVFB90LED | 7"



B EVFB180LED | 9"



C EVFB225LED | 9"

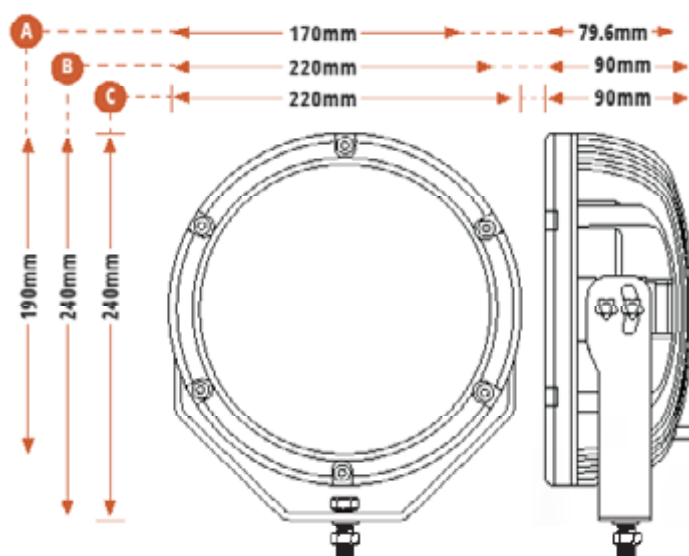

FIREBLADE SERIES

HIGH PERFORMANCE SPOT BEAM DRIVING LIGHTS



3 YEAR
WARRANTY
*ON LUMINAIRE



IMPACT
RESISTANT



IP67 WATER
RESISTANCE



SPOT
BEAM



EVFB90LED | 7"




EVFB180LED | 9"



EVFB225LED | 9"

WATTAGE	90 WATT
LIGHT SOURCE	18 × 5W CREE LEDS
LIGHT OUTPUT	9,000 LUMEN
VOLTAGE	12V-48V DC
OPERATING TEMP.	-40°C TO +80°C
COLOUR TEMP.	6000K
IP RATING	IP67
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	DIECAST ALUMINUM
LENS CONSTRUCTION	POLYCARBONATE/ COVER
BACKET	304 STAINLESS STEEL
LIFESPAN	30,000 HOURS
NET WEIGHT	2.5 KG
MOUNTING SUITABLE	SIDE MOUNT
WARRANTY	3 YEARS

FIREBLADE 90W SPOT DRIVING LIGHT

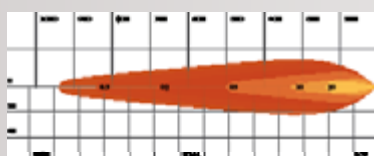

EVFBM105LED

WATTAGE	180 WATT
LIGHT SOURCE	18 × 10W CREE LEDS
LIGHT OUTPUT	18,000 LUMEN
VOLTAGE	12V-48V DC
OPERATING TEMP.	-40°C TO +80°C
COLOUR TEMP.	6000K
IP RATING	IP67
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	DIECAST ALUMINUM
LENS CONSTRUCTION	POLYCARBONATE/ COVER
BACKET	304 STAINLESS STEEL
LIFESPAN	30,000 HOURS
NET WEIGHT	3.3 KG
MOUNTING SUITABLE	SIDE MOUNT
WARRANTY	3 YEARS


FIREBLADE 180W SPOT DRIVING LIGHT



EVFBM105LED

WATTAGE	225 WATT
LIGHT SOURCE	45 × 5W CREE LEDS
LIGHT OUTPUT	20,000 LUMEN
VOLTAGE	12V-48V DC
OPERATING TEMP.	-40°C TO +80°C
COLOUR TEMP.	6000K
IP RATING	IP67
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	DIECAST ALUMINUM
LENS CONSTRUCTION	POLYCARBONATE/ COVER
BACKET	304 STAINLESS STEEL
LIFESPAN	30,000 HOURS
NET WEIGHT	3.3 KG
MOUNTING SUITABLE	SIDE MOUNT
WARRANTY	3 YEARS

FIREBLADE 225W SPOT DRIVING LIGHT

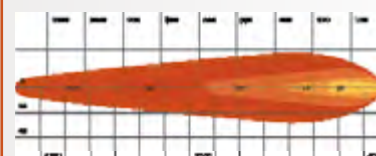

60 WATT EVFBM105LED

HIGH PERFORMANCE
GERMAN MADE
OSRAM LEDS



FIREBLADE MAXX

HIGH PERFORMANCE SPOT BEAM DRIVING LIGHT



STRONG ADJUSTABLE BRACKET




DRL FUNCTION

*EVFBM105LED &
EVFBM160LED ONLY



ULTRA CLEAR
POLYCARBONATE
LENS

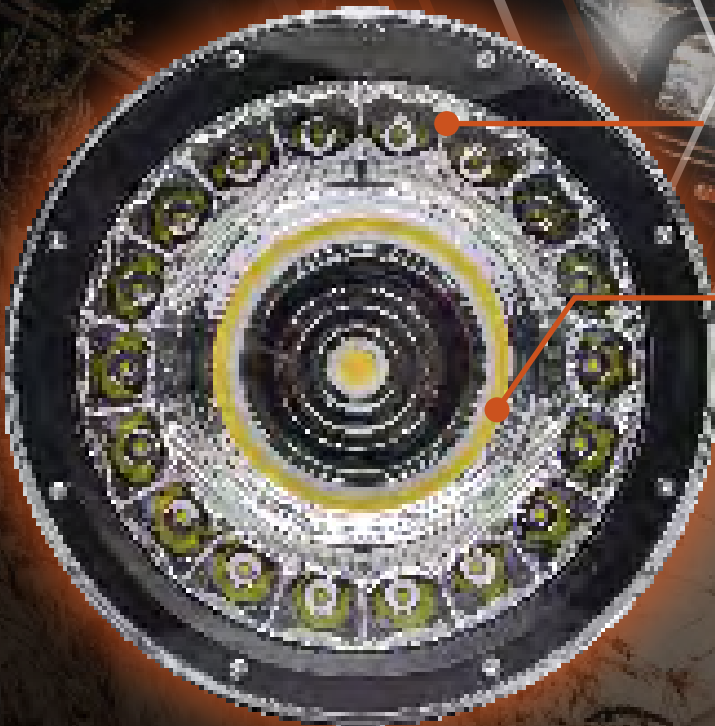

ADVANCED COOLING SYSTEM
BREATHER FILTERS



FIREBLADE MAXX SERIES

HIGH PERFORMANCE SPOT BEAM DRIVING LIGHTS



3 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP68 WATER RESISTANCE



SUPER BRIGHT



HIGH CLARITY OPTICS



HIGHBEAM FOR VISIBILITY & SAFETY



ALUMINIUM HOUSING




ULTRA CLEAR LENS



A EVFBM45LED | 5"

B EVFBM105LED | 7"

C EVFBM45LED | 8.5"

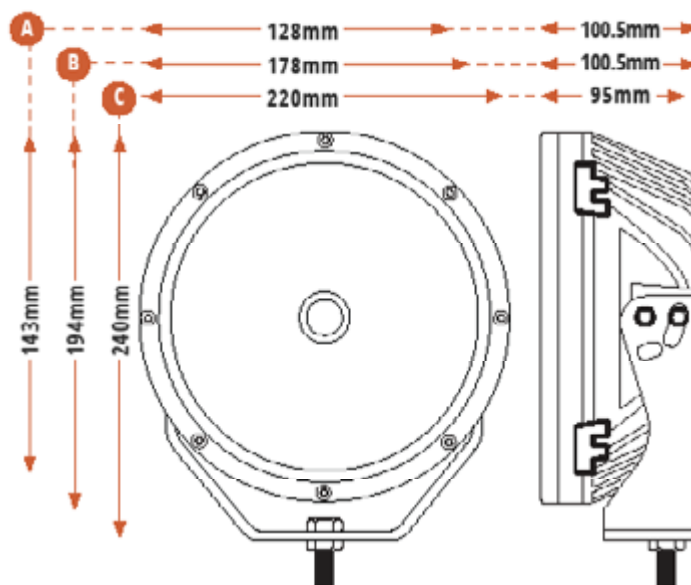

* Style may vary slightly dependent on model



FIREBLADE MAXX SERIES




HIGH PERFORMANCE SPOT BEAM DRIVING LIGHTS



EVFBM45LED | 5"

EVFBM105LED | 7"

EVFBM160LED | 8.6"

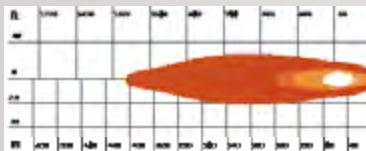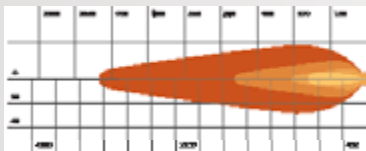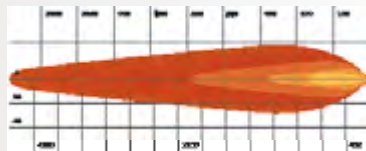	FIREBLADE MAXX 45W SPOT DRIVING LIGHT	FIREBLADE MAXX 105W SPOT DRIVING LIGHT	FIREBLADE MAXX 160W SPOT DRIVING LIGHT
WATTAGE	45 WATT	105 WATT	160 WATT
LIGHT SOURCE	OSRAM 10W + 5W LEDS	OSRAM 10W + 5W LEDS	COB+CREE XBD+CREE XTE
LIGHT OUTPUT	4,050 LUMEN	9,450 LUMEN	14,400 LUMEN
VOLTAGE	9V-32V DC	9V-32V DC	9V-32V DC
OPERATING TEMP.	-45°C TO +85°C	-45°C TO +85°C	-45°C TO +85°C
COLOUR TEMP.	IP68	IP68	IP68
IP RATING	DEUTSCH CONNECTOR	DEUTSCH CONNECTOR	DEUTSCH CONNECTOR
CONNECTOR TYPE	ALUMINUM ALLOY	ALUMINUM ALLOY	ALUMINUM ALLOY
HOUSING	POLYCARBONATE	POLYCARBONATE	POLYCARBONATE
LENS CONSTRUCTION	304 STAINLESS STEEL	304 STAINLESS STEEL	304 STAINLESS STEEL
BACKET	30,000 HOURS	30,000 HOURS	30,000 HOURS
LIFESPAN	1.4 KG	2.8 KG	3.5 KG
NET WEIGHT	UPRIGHT & PENDANT	UPRIGHT & PENDANT	UPRIGHT & PENDANT
MOUNTING SUITABLE	3 YEARS	3 YEARS	3 YEARS
WARRANTY	FLOOD & SPOT	FLOOD & SPOT	FLOOD & SPOT
BEAM	HIGH/ LASER	HIGH/ LASER	HIGH/ LASER
			
	EVFBM45LED	EVFBM105LED	60 WATT EVFBM160LED



STREAMLINED
DESIGN



HIGH PERFORMANCE
GERMAN MADE
OSRAM LEDS

DRL FUNCTION
* EVFBL60LED &
EVFBL132LED



FIREBLADE LASER

COMBINATION BEAM LASER DRIVING LIGHTS



SUPER
BRIGHT



COMBINATION
BEAMS




INTENSE DISTANCE
LASER BEAM

ADVANCED COOLING SYSTEM
BREATHING FILTERS



FIREBLADE LASER SERIES

COMBINATION BEAM LASER DRIVING LIGHTS

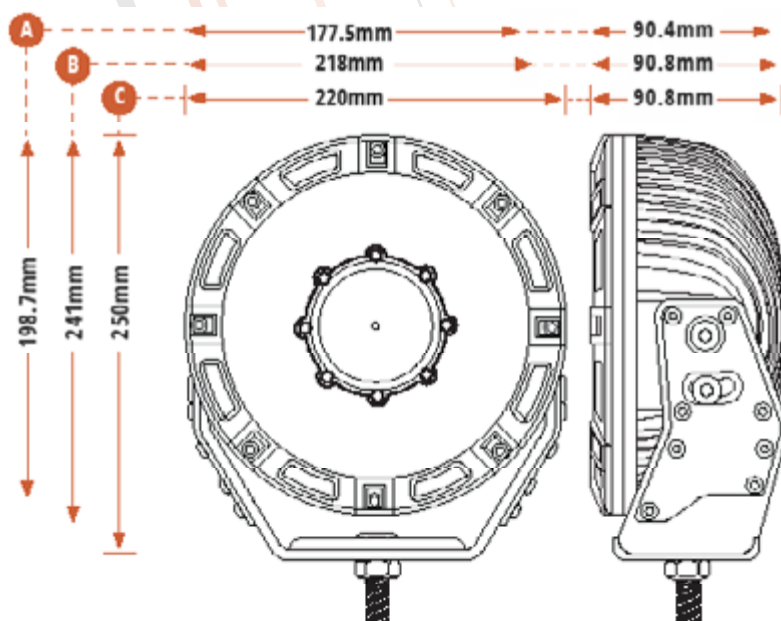

3 YEAR WARRANTY
*ON LUMINAIRE



LOW POWER DRAW



IP67 WATER RESISTANCE



LASER BEAM TECHNOLOGY



EVFBL45LED | 7"



EVFBL120LED | 8.5"



EVFBL132LED | 8.8"



* B dimensions above

FIREBLADE LASER SERIES

FIREBLADE DRIVING SPOT BEAM LIGHT RANGE



3 YEAR
WARRANTY
*ON LUMINAIRE



LONG RANGE
BEAM



IP68 WATER
RESISTANCE



COMBINATION
LASER + LED



EVFB90LED | 7"




EVFB180LED | 9"



EVFB225LED | 9"

WATTAGE	45 WATT
LIGHT SOURCE	OSRAM LEDS + LASER
LIGHT OUTPUT	9,000 LUMEN
VOLTAGE	10V-30V DC
OPERATING TEMP.	-40°C TO +60°C
COLOUR TEMP.	6000K
IP RATING	IP67
CONNECTOR TYPE	DEUTSCH CONNECTOR
HOUSING	DIECAST ALUMINUM ALLOY
LENS CONSTRUCTION	POLYCARBONATE
BRACKET	STAINLESS STEEL
LIFESPAN	30,000 HOURS
NET WEIGHT	2.46 KG
MOUNTING SUITABLE	UPRIGHT & PENDANT
WARRANTY	3 YEARS
BEAM	HIGH/ LASER

FIREBLADE 90W SPOT DRIVING LIGHT

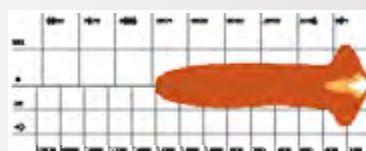

CODE EVFB45LED (SET OF 2)

FIREBLADE 180W SPOT DRIVING LIGHT

120 WATT
OSRAM LEDS + LASER
16,600 LUMEN
10V-30V DC
-40°C TO +60°C
6000K
IP67
DEUTSCH CONNECTOR
DIECAST ALUMINUM ALLOY
POLYCARBONATE
STAINLESS STEEL
30,000 HOURS
4.0 KG
UPRIGHT & PENDANT
3 YEARS
HIGH/ LASER



EVFB120LED (SET OF 2)

FIREBLADE 225W SPOT DRIVING LIGHT

132 WATT
OSRAM LEDS + LASER
18,000 LUMEN
10V-30V DC
-40°C TO +60°C
6000K
IP67
DEUTSCH CONNECTOR
DIECAST ALUMINUM ALLOY
POLYCARBONATE
STAINLESS STEEL
30,000 HOURS
6.0 KG
UPRIGHT & PENDANT
3 YEARS
HIGH/ DRL/ LASER



EVSL132LED (SET OF 2)



ACCESSORIES

4



PORTABLE ACCESSORIES 57

BLAZE 59

PORTABLE ACCESSORIES

RECHARGEABLE WORK LAMPS



3 YEAR
WARRANTY
*ON LUMINAIRE



STRONG
MAGNETIC BASE



IP65 WATER
RESISTANCE



RECHARGEABLE



A ETMS-RL15M



HEAVY
DUTY
HANDLE



EMERGENCY
BLEEP



RUBBER
IMPACT
COVERING



HEAVY
DUTY
HANDLE



MULTIPLE
LIGHT
MODES



USB PORT
FOR PHONE
CHARGING



TOUGH
ALUMINIUM
HOUSING



B ETMS-RL15X



PORTABLE ACCESSORIES

RECHARGEABLE WORK LAMPS



A



B

SPECIFICATIONS

WATTAGE	15 WATT
LIGHT SOURCE	5 X 3W CREE LEDS
LIGHT OUTPUT	1,000 LUMEN
BATTERY	7V 4400MA RECHARGEABLE LI-ON BATTERY
CHARGING TIME	5-6 HOURS
DISCHARGE TIME	3-4 HOURS (@ 100% BRIGHTNESS)
CHARGER	DC PLUG + AC ADAPTER
BATTERY LIFESPAN	500 CHARGE/ DISCHARGE CYCLES
BASE	MAGNETIC
IP RATING	IP65
BEAM	SPOT/ FLOOD
COLOUR TEMP.	6500K
WARRANTY	3 YEARS
CODE	ETMS-RL15M

XTREME PORTABLE 15W WORK LAMP

XTREME PORTABLE 15W WORK LAMP

15 WATT
5 X 3W CREE LEDS
1,000 LUMEN
7V 4400MA RECHARGEABLE LI-ON BATTERY
5-6 HOURS
3-5 HOURS (@ 100% BRIGHTNESS) 11 HOURS (AT LOW MODE)
240VAC/ 12VDC
500 CHARGE/ DISCHARGE CYCLES
MAGNETIC
IP65
SPOT/ FLOOD
6500K
3 YEARS
ETMS-RL15X



BLAZE




WORK SITE TO CAMP SITE



WORK SITE TO CAMP SITE

BLAZE

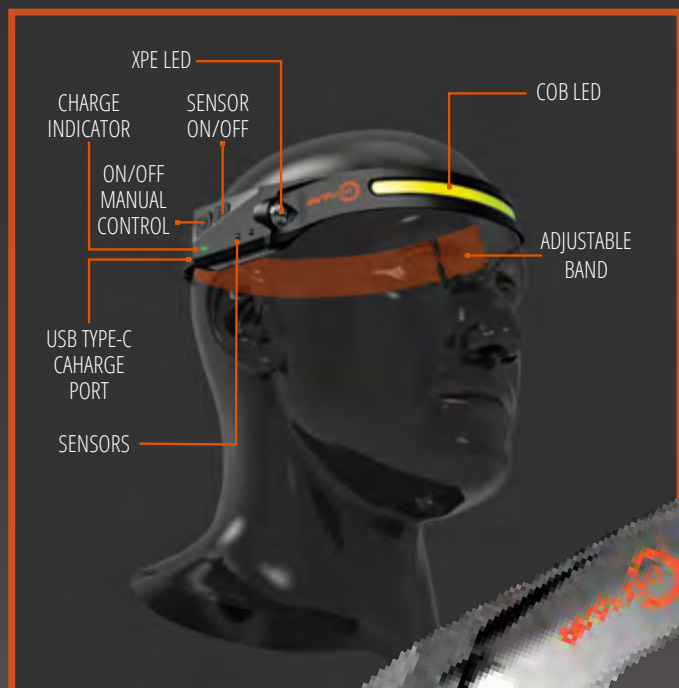


HALO

BLAZE HALO - ULTRA-BRIGHT WAVE CONTROLLED HEAD LAMP FEATURING 5 MODES WITH BOTH SPOT AND FLOOD BEAMS. COMFORTABLE & LIGHTWEIGHT SILICONE - ELASTIC COMBO BAND.

340
LUMEN
OUTPUT

70
GRAMS
WEIGHT

4-6
HOURS
RUN TIME




WAVE CONTROLLED HEAD LAMP

ETG-BZHALO


5 BEAM MODES




FLOOD BEAM



HIGH FLOOD BEAM

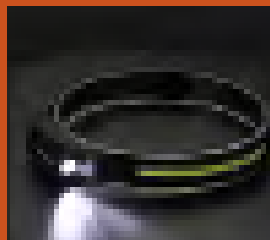

SPOT BEAM



HIGH SPOT BEAM



SPOT & FLOOD BEAM

BLAZE

TACTICAL FLASHLIGHT



HIGH
LUMEN
OUTPUT


100
GRAMS
WEIGHT

ALUMINIUM
ALLOY
HOUSING



BEAM

BLAZE BEAM - A SUPER POWERFUL TACTICAL TORCH FEATURING ZOOM FOCUS, 5 LIGHT MODES AND EASY RECHARGE. COMPACT AND LIGHTWEIGHT IT IS PERFECT FOR SECURITY, CAMPING AND TREKKING.

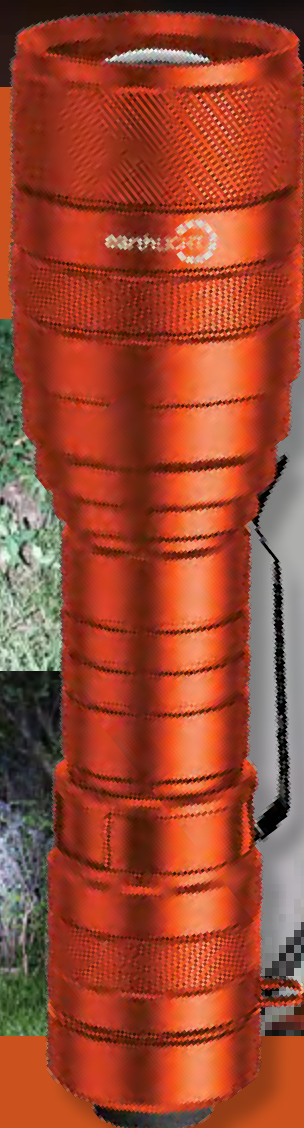

ETG-BZBEAM



MULTIPLE BEAM TORCH

ETG-BZBAR

BAR



BLAZE BAR MULTI BEAM TORCH FEATURES 6 LIGHT MODES INCLUDING SPOT TORCH BEAM, LIGHT BAR IN 3 BRIGHTNESS SETTINGS, INSECT REPELLING YELLOW LIGHT AND RED - BLUE WARNING PATTERN. EASY TO CHARGE - SIMPLY REMOVE THE POWER CAP TO ACCESS CHARGE PORT.



EASY RECHARGE OR CHARGING



FLASHLIGHT & LIGHTBAR FUNCTIONS

POD LANTERN

BLAZE POD – THE COMPACT HEAVY DUTY POD LANTERN FEATURES HANGING ARMS AS WELL AS SUPER STRONG MAGNETS FOR MOUNTING ON MAGNETIC SURFACES. IT HAS MULTIPLE LANTERN LIGHT LEVELS, FLASHLIGHT AND SOS MODES – IT EVEN WORKS AS A 7200mAh POWER BANK FOR MOBILE PHONES.



MAGNETIC ATTACHMENT



PORTABLE CHARGING SOURCE



EASY USB RECHARGE



IP65 WATER PROOF



POD

ETG-BZPOD



POWER/ MODE BUTTON

USB CHARGE PORT

METAL HANGING ARMS

CHARGE INDICATOR

STRONG MAGNETS FOR MAGNETIC MOUNTING

LANTERN FLOOD LIGHT WITH CENTRAL FLASHLIGHT

CCT
COLOUR TEMPERATURE CHANGEABLE

660
MAX. LUMEN OUTPUT

11
HOURS RUN TIME



www.earthtrackgroup.com.au

1300 410 485

sales@etms.com.au

34 Remisko Drive, Forrestdale, WA 6112

03/2023

