

COMPACT LIGHT TOWER



Atlas is an innovative light tower that outperforms traditional diesel-driven units by offering superior, low-glare illumination with significantly reduced energy consumption and weight. Engineered for efficiency and mobility, Atlas delivers exceptional light coverage in a compact, transportable design.

REDUCED GLARE







Asymmetrical Lights minimising glare

Drop Prevention System

Minimal Maintenance

1200 watt System

7 meter Mast

ILLUMINATING BETTER ENVIRONMENTS 1300 410 485 | sales@etms.com.au

SPECIFICATIONS

ATLAS COMPACT LIGHT TOWER

Model	ETG-13AT007
Illuminated Surface	4296 m2
System Power	1,200W
Luminous Flux	168,000 lm
Lumen/W	140
Colour Temperature (CCT)	5000k
Operating Voltage	220-240VAC/50Hz
Power Factor	>0.92
Electrical Class	Class 1
Protection	Over Voltage, Over Temperature, Short Circuit
Ambient Operating Temp. Range	30deg C to +45deg C
Storage Temp. Range	-40deg C to +80deg C
IK Class	IK08
IP Class	IP65 (Lighting) IP54 (chassis)
Noise Emissions	<5dB(A)
Fully Extended Height	7.1 METERS
Wiring	Manual
Mast Rotation	340°
Mobility	Forklift pockets, lifting point, handles
Dimensions (min)	788 x 1752 x 2046 mm
Dimensions (max)	1455 x 1752 x 6930 mm
Housing Finish	UV stabilised coating
Weight	217kg


earthtrack

ILLUMINATING BETTER ENVIRONMENTS[™]



DIMENSIONS

ATLAS COMPACT LIGHT TOWER

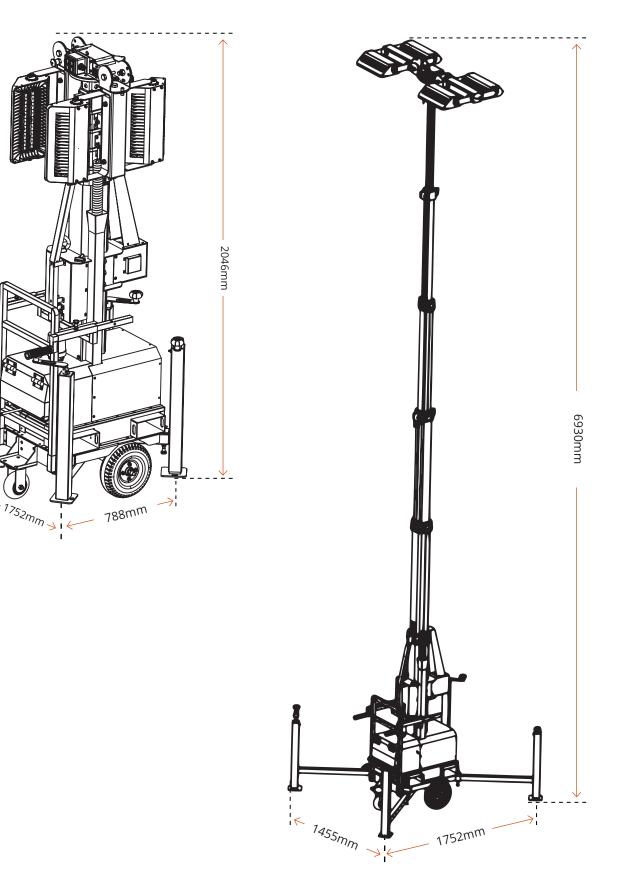



ILLUMINATING BETTER ENVIRONMENTS

15





1300 410 485 | sales@etms.com.au | www.etms.com.au